PB85-116184

Stability of Organic Audit Materials and Results of Source Test Analysis Audits Status Report Number 6

Research Triangle Inst.
Research Triangle Park, NC

Prepared for

Environmental Monitoring Systems Lab.
Research Triangle Park, NC

Oct 84

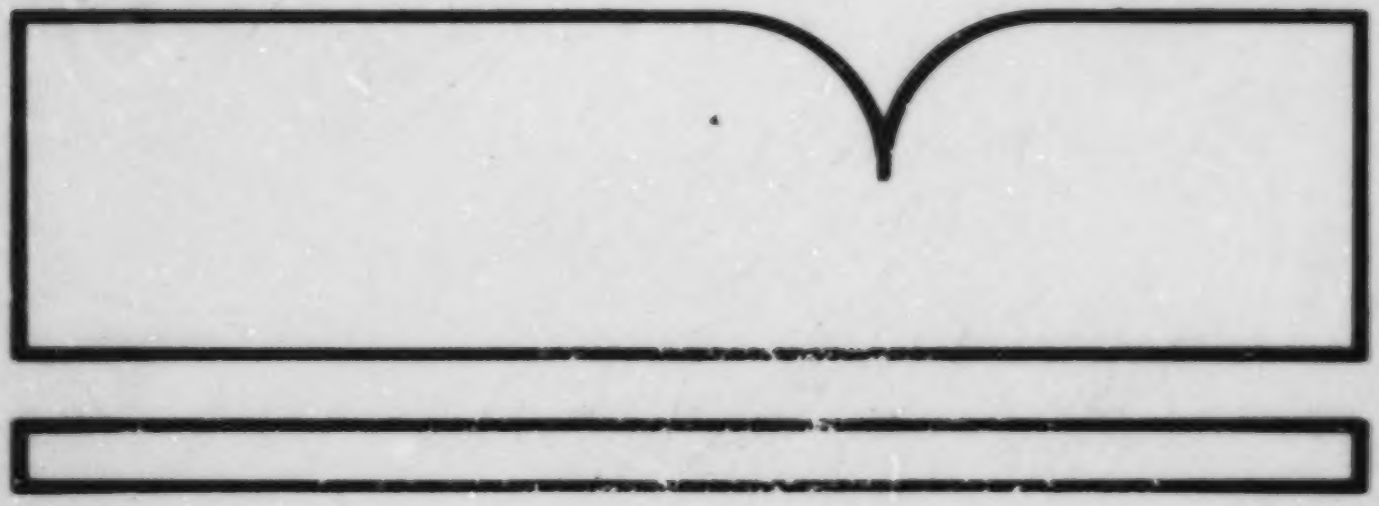

U.S. Department of Commerce
National Technical Information Service
NTIS

PB85-116184

EPA-600/4-84-079
October 1984

STABILITY OF ORGANIC AUDIT MATERIALS AND RESULTS OF SOURCE TEST ANALYSIS AUDITS

Status Report #6

R. K. M. Jayanty
W. F. Gutknecht
C. E. Decker

EPA Project Officer: D. J. von Lehmden

EPA Contract No.: 68-02-3767

Prepared for

U.S. Environmental Protection Agency
Environmental Monitoring Systems Laboratory
Quality Assurance Division
Research Triangle Park, North Carolina 27711

REPRODUCED BY
NATIONAL TECHNICAL
INFORMATION SERVICE
U.S. DEPARTMENT OF COMMERCE
SPRINGFIELD, VA. 22161

TECHNICAL REPORT DATA
(Please read Instructions on the reverse before completing)

1. REPORT NO.	2.	3. RECIPIENT'S ACCESSION NO.
EPA-600/4-84-079		PB85 116184

4. TITLE AND SUBTITLE	5. REPORT DATE
Stability of Organic Audit Materials and Results of Source Test Analysis Audits--Status Report #6	October 1984
	6. PERFORMING ORGANIZATION CODE
7. AUTHOR(S)	8. PERFORMING ORGANIZATION REPORT NO.
R.K.M. Jayanty, W.F. Gutknecht and C.E. Decker	
9. PERFORMING ORGANIZATION NAME AND ADDRESS	10. PROGRAM ELEMENT NO.
Research Triangle Institute Research Triangle Park, NC 27709	HAP - Project D0101
	11. CONTRACT/GRANT NO.
	Contract No. 68-02-3767
12. SPONSORING AGENCY NAME AND ADDRESS	13. TYPE OF REPORT AND PERIOD COVERED
U.S. Environmental Protection Agency Environmental Monitoring Systems Laboratory Research Triangle Park, NC 27711	14. SPONSORING AGENCY CODE EPA/600/08

15. SUPPLEMENTARY NOTES

16. ABSTRACT

A repository of 44 gaseous compounds including hydrocarbons, halocarbon, and sulfur species has been established under contract with the U.S. Environment Protection Agency (USEPA). The main objectives of this on-going project are (1) to provide gas mixtures to EPA, state/local agencies, or their contractors, as performance audits to assess the accuracy of source emission measurements in certain organic chemical manufacturing inductries, (2) to corroborate the vendor's certified analysis of the gas mixtures by in-house analysis, (3) to determine the stability of the gas mixtures with time by in-house analysis, and (4) to explore the feasibility of new audit materials as requested by EPA.

Thus far, 29 compounds have been used to conduct 130 different audits. The results of these audits and a description of the experimental procedures used for analyses and available stability data are presented in the status report. Seventy percent of the audit results are within 15 percent of the expected values.

Compound stabilities have been determined through multiple analyses of the cylinders containing them. Stability data for up to 6 years is available for many compounds and over 3 years for most compounds. Compounds that are unstable and not suitable for use as an audit material are identified.

17. KEY WORDS AND DOCUMENT ANALYSIS

a. DESCRIPTORS	b. IDENTIFIERS/OPEN ENDED TERMS	c. COSATI Field/Group
performance audits, gas stability, hydrocarbons, halocarbons, benzene, toluene, methyl mercaptan, viny chloride, trichloroethylene, carbonyl sulfide, hydrogen sulfide, 1, 2-dichloroethane carbon tetrachloride and method 25 gas mixture		

18. DISTRIBUTION STATEMENT	19. SECURITY CLASS *(This Report)*	21. NO. OF PAGES
RELEASE TO PUBLIC	UNCLASSIFIED	85
	20. SECURITY CLASS *(This page)*	22. PRICE
	UNCLASSIFIED	

EPA Form 2220-1 (Rev. 4-77) PREVIOUS EDITION IS OBSOLETE

NOTICE

This document has been reviewed in accordance with U.S. Environmental Protection Agency policy and approved for publication. Mention of trade names or commercial products does not constitute endorsement or recommendation for use.

TABLE OF CONTENTS

SECTION NO.		PAGE
1.0	INTRODUCTION	1
	1.1 Objectives	1
	1.2 Audit Materials Contained in the Repository	1
2.0	EXPERIMENTAL PROCEDURES	5
	2.1 Instrumentation	5
	2.2 Calibration	5
3.0	PERFORMANCE AUDITS	7
4.0	STABILITY STUDIES	22
5.0	SUMMARY AND CONCLUSIONS	24
REFERENCES		25
ATTACHMENT 1 - STABILITY DATA AS OF AUGUST 1984		26

SECTION 1.0
INTRODUCTION

1.1 OBJECTIVES

The need for reliable standards for source emission measurement of gaseous hydrocarbons, halocarbons and sulfur compounds is well established. The Research Triangle Institute (RTI) under contract to the U.S. Environmental Protection Agency (USEPA) has responded to this need through development of an extensive repository of 39 gaseous compounds. The primary objectives of this ongoing project are (1) to provide accurate gas mixtures to EPA, state/local agencies, or their contractors as performance audits to assess the relative accuracy of source emission measurements in certain organic chemical manufacturing industries, (2) to examine the vendor's certified analysis of the gas mixtures by in-house analysis, (3) to determine the stability of the gas mixtures with time by in-house analysis, and (4) to develop new audit materials, as requested by EPA.

This report describes the current status of this project. Included in the report are (1) a description of the experimental procedures used for initial cylinder analyses and collection of stabilty data, (2) a description of the audit procedure, and (3) currently available audit results and stability data. Complete details of the study with statistical analyses for ten (10) halocarbons and eight (8) other organics are presented in two journal publications (1,2). Statistical analysis for the remaining compounds will be presented in a future report.

1.2 AUDIT MATERIALS CONTAINED IN THE REPOSITORY

Currently, 45 gaseous compounds have been investigated as audit materials. Six of these gaseous compounds have been found to be unstable in cylinders and not suitable as audit materials. Two compounds (ethylene dibromide and 1,1,2,2 tetrachloroethane) have been recently ordered; therefore, their stability as audit materials are unknown at this time. The other 37 gaseous compounds in the repository are suitable for conducting performance audits during source testing. The

compounds were selected based on the anticipated needs of the Emissions Measurements Branch, Office of Air Quality Planning and Standards, USEPA. Table 1 lists the 45 compounds, the concentration ranges, the number of cylinders of each compound currently in the repository, and the cylinder construction material. In Table 1, the audit materials fall into two concentration ranges. The low concentration range between 5 and 50 parts per million (ppm) simulates possible emission standard levels. The high concentration range between 50 and 700 ppm simulates expected source emission levels. The balance gas for all gas mixtures is nitrogen.

TABLE 1. AUDIT MATERIALS CURRENTLY IN THE REPOSITORY

Compound	Low Concentration Range			High Concentration Range		
	No. of Cylinders	Concentration Range (ppm)	Cylinder Construction*	No. of Cylinders	Concentration Range (ppm)	Cylinder Construction*
Benzene	9	5 - 20	S	12	60 - 400	S
Ethylene	4	5 - 20	Al	4	300 - 700	Al
				6	3000 - 20,000	Al
Propylene	3	5 - 20	Al	3	300 - 700	Al
Methane/Ethane	-	------	—	4	1000 - 6000(M), 200 - 700(E)	Al
Propane	4	5 - 20	Al	4	300 - 700	Al
				4	1000 - 20,000	Al
Toluene	5	5 - 20	S	4	100 - 700	LS
Hydrogen Sulfide	7	5 - 50	Al	7	100 - 700	Al
Meta-Xylene	2	5 - 20	S	2	300 - 700	LS
Methyl Acetate	2	5 - 20	S	2	300 - 700	S
Chloroform	2	5 - 20	S	1	300 - 700	S
Carbonyl Sulfide	1	5 - 20	S	4	100 - 300	S
Methyl Mercaptan	3	3 - 10	Al	-	---------	-
Hexane	2	20 - 80	Al	2	1000 - 3000	LS
1,2-Dichloroethane	4	5 - 20	Al	4	100 - 600	Al
Cyclohexane	-	------	—	1	80 - 200	S
Methyl Ethyl Ketone	1	30 - 80	S	-	---------	-
Methanol	1	30 - 80	Al	-	---------	-
1,2-Dichloropropane	2	5 - 20	Al	2	300 - 700	LS
Trichloroethylene	2	5 - 20	Al	2	100 - 600	Al
1,1-Dichloro-ethylene	2	5 - 20	Al	2	100 - 600	Al
**1,2-Dibromo-ethylene	-	------	—	-	---------	—
Perchloro-ethylene	2	5 - 20	S	2	300 - 700	LS
Vinyl Chloride	9	5 - 30	S	-	---------	—
1,3-Butadiene	1	5 - 30	S	-	---------	—
Acrylonitrile	1	5 - 20	LS, Al	1	300 - 500	LS, Al
**Aniline	-	------	—	-	---------	—
Methyl Isobutyl Ketone	1	5 - 20	Al	-	---------	—

*Cylinder constructions: Al = Aluminum, S = Steel, LS = Low-Pressure Steel

**Cylinders are no longer available in the repository since the compounds are found to be unstable in the cylinders.

TABLE 1. AUDIT MATERIALS CURRENTLY IN THE REPOSITORY (Continued)

Compound	Low Concentration Range			High Concentration Range		
	No. of Cylinders	Concentration Range (ppm)	Cylinder Construction*	No. of Cylinders	Concentration Range (ppm)	Cylinder Construction*
**Para-dichlorbenzene	-	---	S	-	---------	--
**Ethylamine	-	---	Al	-	---------	--
**Formaldehyde	-	---	-	-	---------	--
Methylene Chloride	1	5 - 20	Al	-	---------	--
Carbon Tetrachloride	1	5 - 20	Al	-	---------	--
Freon 113	1	5 - 20	Al	-	---------	--
Methyl Chloroform	1	5 - 20	Al	-	---------	--
Ethylene Oxide	1	5 - 20	Al	-	---------	--
Propylene Oxide	1	5 - 20	Al	1	75 - 200	Al
Allyl Chloride	1	5 - 20	S	1	75 - 200	S
Acrolein	1	5 - 20	Al	-	---------	--
Chlorobenzene	3	5 - 20	Al	-	---------	--
Carbon Disulfide	-	---	Al	1	75 - 200	Al
**Cyclohexanone	-	---	Al	-	---------	--
***EPA Method 25 Gas	6	100 - 200	Al	3	750 - 2000	Al
Ethylene Dibromide	2	5 - 20	S	2	100 - 300	S
Tetrachloroethane	1	5 - 20	S	-	---------	--

*Cylinder construction: Al = Aluminum, S = Steel, LS = Low Pressure Steel

**Cylinders are no longer available in the repository since the compounds are found to be unstable in the cylinders.

***The gas mixture contains an aliphatic, an aromatic and carbon dioxide in nitrogen. Concentrations shown are reported in ppmC.

SECTION 2.0
EXPERIMENTAL PROCEDURES

Analysis of the cylinder gases is required to corroborate the concentrations reported by the company which prepared the gas mixtures and also to measure concentration changes with time, that is, estimate stability of the compounds.

2.1 INSTRUMENTATION

Analyses are presently performed with (1) a Hewlett-Packard 5880A Gas Chromatograph with flame ionization and electron capture detectors, and (2) a second Hewlett-Packard 5880A Gas Chromatograph with a flame photometric detector. The flame photometric detector has been used principally for measurement of the sulfur-containing species. The gaseous samples are injected onto the columns by means of gas sampling valves constructed of Hastalloy C (high nickel content and low adsorptive properties). These valves are equipped with interchangeable sample loops to allow the injection of variable but known volumes of gas. The volumes of the sample loops are measured gravimetrically.

The gas chromatographic parameters used in the measurement of individual compounds and any problems with the analysis are listed in Attachment 1.

2.2 CALIBRATION

Calibration of the gas chromatographs has involved measurement of known concentrations of gases in air or nitrogen. The source or method of preparation of calibration standards varies depending on the gas involved.

National Bureau of Standards, Standard Reference Materials (NBS-SRMs) of methane, propane, and benzene were used for the calibration of the GC for the measurement of methane, propane, and benzene audit materials. These same gases are used to calibrate the chromatographic system for measurement of ethylene and propylene, assuming the FID response per carbon is constant from compound to compound.

A second method for preparation of calibration standards involves the use of permeation tubes. For example, the calibration gases for vinyl chloride and ethylene oxide have been generated in this manner. The permeation tube is placed in a temperature-controlled chamber and zero air is passed over the permeation tube at a known flow rate. The resultant gaseous mixture is further diluted, if necessary, using additional zero air in a glass dilution bulb. The final mixture is collected in a gas sampling bulb or a Tedlar® bag, and analyzed by GC-FID. The permeation rates of the tubes are determined periodically by weight loss.

A third method for developing a calibration standard is the "glass bulb" technique. A known volume of the compound, either gas or liquid, is injected into an evacuated glass bulb of known volume. The volume of the bulb is determined by the gravimetric method. The bulb is then returned to atmospheric pressure with a balance gas of choice. If a pure liquid is injected, total vaporization is assumed and the concentration is calculated by using the ideal gas law. Additional dilutions are also made, if necessary, by utilizing additional bulbs or by repeatedly pressurizing with a balance gas to a known pressure and then partially evacuating to a known pressure.

With each of these approaches, multipoint calibration curves are prepared each time a sample is analyzed. Certain quality control procedures are followed, for example, equilibrating the permeation system and the glass bulbs with the sample gas before taking an aliquot for GC measurement. Also, an NBS-SRM of methane is used to verify the constancy of the detector response. Blank measurements are taken during cylinder analysis and generally, blank measurements have shown no signal above the baseline.

SECTION 3.0
PERFORMANCE AUDITS

RTI supplies repository cylinders for audits upon request from the EPA, state or local agencies or contractors. A contractor must be performing source emission tests at the request of EPA or a state or local agency in order to qualify for the performance audit. When a request is received, the contents of the cylinders are analyzed, the tank pressures are measured and the cylinders are shipped by overland carrier. Tank regulators are also provided when requested. A letter is included with the cylinders which provides general instructions for performance of the audit. The audit material concentration and cylinder pressure are provided to the requesting agency, audit coordinator.

To date, 130 individual audits have been initiated, and 128 are complete. The audit results currently available are presented in Table 2. Generally, the results of the audits show agreement of $\pm$ 15 percent with the audit material concentrations measured by RTI.

TABLE 2. SUMMARY OF PERFORMANCE AUDIT RESULTS

Audit No.	Client***	Industry	Audit material	RTI audit conc. (ppm)	Client audit % bias (Avg.)*	Status of audit**
1	A	Ethylene oxide production	Ethylene in N_2	3,240	-22.5	E
			Ethylene in N_2	21,200	-20.0	
2	A	Ethylene oxide production	Methane/ethane in N_2	1,710Me/220Et	+9/-20	E
			Methane/ethane in N_2	8,130Me/597Et	+9/-1.00	
3	A	Ethylene oxide production	Methane/ethane in N_2	1,021Me/315Et	+21.5/-4.50	E
			Methane/ethane in N_2	6,207Me/773Et	+23.5/-4.50	
4	A	Acetone production	Benzene in N_2	79.0	-19.0	E
			Benzene in N_2	374.0	-11.0	
5	A	Maleic anhydride production	Benzene in N_2	138	-9.40	E
			Benzene in N_2	300	+4.70	
6	A	Ethylene oxide production	Ethylene in N_2	5,440	-27.0	E
			Ethylene in N_2	18,900	-33.0	
7	B	Maleic anhydride production	Benzene in N_2	80.0	+2.30	E
			Benzene in N_2	355	+27.5	
8	C	Maleic anhydride production	Benzene in N_2	101	+12.9	E
			Benzene in N_2	387	+14.5	
9	D	Ethyl benzene styrene manufacturer	Benzene in N_2	71.0	-2.80	E
			Benzene in N_2	229	-3.90	
10	E	Gasoline bulk terminal	Benzene in N_2	62.0	+3.80	E
			Benzene in N_2	80.0	+3.40	
11	F	Gasoline transfer terminal	Benzene in N_2	142	-3.50	E
			Benzene in N_2	294	+3.20	
12	F	Gasoline transfer terminal	Benzene in N_2	268	-11.8	E
			Benzene in N_2	343	-1.00	

TABLE 2. SUMMARY OF PERFORMANCE AUDIT RESULTS (Continued)

Audit No.	Client***	Industry	Audit material	RTI Audit conc. (ppm)	Client Audit % bias (Avg.)*	Status of audit**
13	F	Gasoline transfer terminal	Benzene in N_2	129	+4.70	E
			Benzene in N_2	318	+8.70	
14	F	Gasoline transfer terminal	Benzene in N_2	10.7	+2.60	E
15	C	Nitrobenzene manufacturing	Benzene in N_2	9.73	-4.60	E
			Benzene in N_2	269	-2.60	
16	F	Gasoline bulk terminal	Benzene in N_2	8.20	-2.30	E
			Benzene in N_2	140	-1.80	
17a	F	Gasoline bulk terminal	Benzene in N_2	9.50	+10.4	E
			Benzene in N_2	127	-2.80	
17b	F	Gasoline bulk terminal	Benzene in N_2	9.50	+12.5	E
			Benzene in N_2	127	-6.30	
18	G	Coke oven	Hydrogen sulfide in N_2	7.05	-24.8	E
			Hydrogen sulfide in N_2	9.73	-22.9	
19	F	Gasoline bulk terminal	Benzene in N_2	12.0	-0.80	E
			Benzene in N_2	218	+7.30	
20	F	Gasoline bulk terminal	Benzene in N_2	7.65	+16.3	E
			Benzene in N_2	396	+1.50	
21	F	Linear alkyl-benzene manufacturing	Benzene in N_2	98.0	+5.70	E
			Benzene in N_2	294	+6.80	
			Benzene in N_2	331	+4.50	
22	F	Gasoline bulk terminal	Benzene in N_2	9.85	-4.10	E
			Benzene in N_2	81.0	-6.80	
23	F	Gasoline bulk terminal	Benzene in N_2	10.2	+4.60	E
			Benzene in N_2	61.0	-9.50	

TABLE 2. SUMMARY OF PERFORMANCE AUDIT RESULTS (Continued)

Audit No.	Client***	Industry	Audit material	RTI audit conc. (ppm)	Client audit % bias (Avg.)*	Status of audit**
24	H	Industrial surface coating process	Toluene in N_2	14.8	-1.90	E
			Propylene in N_2	474	+0.20	
			Propane in N_2	20.3	-2.30	
			Methane/ethane in N_2	1,640Me/195et	-13.5(as methane)	
25	C	Acrylic acid and ester Production	Propane in N_2	10.1	+8.60	E
			Propane in N_2	710	+5.60	
26	C	Acrylic acid and ester Production	Propane in N_2	5.1	+17.6	E
			Propane in N_2	607	-3.60	
27	E	Maleic anhydride	Benzene in N_2	10.2	NA	F
			Benzene in N_2	218	NA	
28A	A	Carbon adsorber	Toluene in N_2	8.55	-6.40	E
			Toluene in N_2	405	-1.00	
28B	A	Carbon adsorber	Toluene in N_2	8.55	+4.10	E
			Toluene in N_2	405	NA	
28C	A	Carbon adsorber	Toluene in N_2	8.55	-8.80	E
			Toluene in N_2	405	NA	
29	EPA, QAD	Instrument check-out	Ethylene in N_2	4.75	+4.00	E
			Ethylene in N_2	19.6	+3.10	
			Ethylene in N_2	312	-0.80	
			Ethylene in N_2	3020	+5.30	
			Ethylene in N_2	20400	-8.60	

TABLE 2. SUMMARY OF PERFORMANCE AUDIT RESULTS (Continued)

Audit No.	Client***	Industry	Audit material	RTI Audit conc. (ppm)	Client Audit % bias (Avg.)*	Status of audit**
30	EPA, QAD	Instrument check-out	Benzene in N_2	8.20	+0.30	E
			Benzene in N_2	78.0	-0.90	
			Benzene in N_2	133	-4.00	
			Benzene in N_2	348	-0.90	
31	EPA, QAD	Instrument check-out	Toluene in N_2	405	+3.20	E
			Toluene in N_2	579	+1.00	
32	EPA, QAD	Instrument check-out	Methyl acetate in N_2	0.80	-2.60	E
			Methyl acetate in N_2	17.2	+1.70	
			Methyl acetate in N_2	326	-1.50	
			Methyl acetate in N_2	455	-1.30	
33	EPA, QAD	Instrument check-out	Propylene in N_2	4.90	-22.4	E
			Propylene in N_2	19.7	-7.80	
			Propylene in N_2	300	+1.00	
			Propylene in N_2	685	-1.80	
34	EPA, QAD	Instrument check-out	Propane in N_2	14.6	-0.70	E
			Propane in N_2	303	+7.60	
			Propane in N_2	439	+6.20	
35a	I	Vegetable oil plant	Hexane in N_2	82.2	+8.10	E
			Hexane in N_2	1980	+3.00	
35b	I	Vegetable oil plant	Hexane in N_2	82.2	-1.20	E
			Hexane in N_2	1980	-1.30	
36	A	Carbon adsorber	Toluene in N_2	8.20	-2.40	E

TABLE 2. SUMMARY OF PERFORMANCE AUDIT RESULTS (Continued)

Audit No.	Client***	Industry	Audit material	RTI audit conc. (ppm)	Client audit % bias (Avg.)*	Status of audit**
37	B	Coke oven	Benzene in N_2	12.1	+0.80	E
			Benzene in N_2	105	+2.90	
38	D	Ethylbenzene/ styrene	Benzene in N_2	9.90	+5.70	E
			Benzene in N_2	77.9	+3.60	
			Benzene in N_2	345	+1.50	
39	B	Coke oven Byproduct	Benzene in N_2	8.20	-2.60	E
			Benzene in N_2	85.4	-8.70	
40	D	Coke oven Byproduct	Benzene in N_2	10.9	+20.0	
			Benzene in N_2	147	+6.80	
41	H	Paint spray	Benzene in N_2	10.8	NA	F
			m-Xylene in N_2	16.4	NA	
42	H	Tire manufacturing	Cyclohexane in N_2	93.4	-11.1	E
43	B	Coke oven	Benzene in N_2	7.54	+0.10	D
			Benzene in N_2	225	+0.40	
44	D	Ethylbenzene/ styrene	Benzene in N_2	8.20	-3.40	D
			Benzene in N_2	74.5	-0.20	
			Propane in N_2	10.6	-3.00	
45	F	Industrial surface coating	Propane in Air	316	-3.20	E
			Propane in Air	450	-2.00	
46	EPA, QAD	Tire manufacturing	Propane in Air	15.0	NA	F
			Propane in Air	316	NA	

TABLE 2. SUMMARY OF PERFORMANCE AUDIT RESULTS (Continued)

Audit No.	Client***	Industry	Audit material	RTI audit conc. (ppm)	Client audit % bias (Avg.)*	Status of audit**
47	EPA, QAD	Tire manufacturing	Propane in air	20.8	-18.4	E
			Propane in air	453	+13.4	
48	D	Dimethyl terephthalate production	Meta-xylene in N_2	487	-2.10	E
49	EPA, QAD	Instrument check-out	Toluene in N_2	61.5	NA	F
			Methanol in N_2	55.2	NA	
50	EPA, QAD	Tire oven manufacturing	Propane in air	4.90	-48.8	E
			Propane in air	613	+16.9	
			Propane in air	718	+16.8	
51	EPA, QAD	Instrument check-out	Propane in air	20.8	+20.0	E
			Propane in air	316	-9.20	
52	D	Styrene manufacturing	Benzene in N_2	106	-4.90	E
			Benzene in N_2	358	-3.70	
			1,3-Butadiene in N_2	20.9	+23.8	
53	I	Veg. oil manufacturing	Cyclohexane in N_2	99.0	-3.50	E
54	M	Research	Chloroform in N_2	16.5	NA	F
			Chloroform in N_2	531	NA	
55	J	Research	Ethylene in N_2	300	+1.40	E

TABLE 2. SUMMARY OF PERFORMANCE AUDIT RESULTS (Continued)

Audit No.	Client***	Industry	Audit material	RTI audit conc. (ppm)	Client audit % bias (Avg.)*	Status of audit**
56	K	Reactivity of vent activated charcoal	Chloroform in N_2	8.11	NA	F
57	EPA, QAD	Instrument check-out	Hydrogen sulfide in N_2	16.2	NA	F
58	C	Coil coating	Propane in Air	5.20	NA	E
59	L	Maleic anhydride	Propane in Air	472	-8.40	
			Benzene in N_2	9.45	NA	
60	M	Research	Benzene in N_2	341	NA	F
61	EPA (State of Conn.)	Maleic anhydride	Audit not initiated	—	—	—
62	O		Benzene in N_2	133	NA	F
			Meta-xylene in N_2	760	NA	
63	M	Paper and pulp	Hexane in N_2	1990	NA	F
64	P	Research	Methyl mercaptan in N_2	4.44	NA	F
			Benzene in N_2	13.4	NA	
			Methyl ethyl ketone in N_2	44.5	NA	F
65	E	Coke oven Byproduct Recovery	Benzene in N_2	7.93	-2.90	
			Benzene in N_2	132	+1.39	E

TABLE 2. SUMMARY OF PERFORMANCE AUDIT RESULTS (Continued)

Audit No.	Client***	Industry	Audit material	RTI audit conc. (ppm)	Client audit % bias (Avg.)*	Status of audit**
66	D	Rubber manufacturing	Benzene in N_2	12.0	+14.2	E
			Benzene in N_2	10.2	0	
			Benzene in N_2	100	+6.40	
			Benzene in N_2	335	+6.00	
			Hexane in N_2	79.8	+1.80	
			Hexane in N_2	3080	-7.50	
			Propane in Air	9.97	-3.20	
			Propane in Air	314	-10.8	
67	E	Coke oven Byproduct Recovery	Benzene in N_2	8.29	-2.20	E
			Benzene in N_2	75.7	-2.50	
68	EPA, Region II	Vinyl chloride manufacturing	Vinyl chloride in N_2	5.74	NA	F
			Vinyl chloride in N_2	28.3	NA	
69	EPA, QAD	Instrument Check	Propylene in N_2	328	-7.00	E
			Propylene in N_2	725	-8.30	
70	EPA, Region I	Vinyl chloride manufacturing	Vinyl chloride in N_2	7.50	NA	F
71	E	Degreasing vent	Trichloroethylene in N_2	14.9	-0.40	E
			Trichloroethylene in N_2	566	-8.70	
72	EPA, QAD	Instrument check-out	Hexane in N_2	3080	NA	F
73	EPA, QAD	Combustion efficiency test	Hydrogen sulfide in N_2	16.2	-7.50	E
			Methyl mercaptan in N_2	8.22	-8.90	

TABLE 2. SUMMARY OF PERFORMANCE AUDIT RESULTS (Continued)

Audit No.	Client***	Industry	Audit material	RTI audit conc. (ppm)	Client audit % bias (Avg.)*	Status of audit**
74	E	Vinyl chloride manufacturing	1,2-Dichloroethane in N_2	9.30	+6.00	E
			1,2-Dichloroethane in N_2	462	+3.70	
75	N	Coil coating	Propane in air	10.0	NA	F
			Propane in air	309	NA	
76	F	Coil coating	Propane in air	10.0	NA	F
			Propane in air	309	NA	
77	D	Maleic anhydride	Benzene in N_2	9.46	-6.60	E
			Benzene in N_2	66.9	-11.7	
78	EPA, Region VII	Instrument checkout	Benzene in N_2	120	NA	F
			Hexane in N_2	30.2	NA	
79	D	Maleic anhydride	Benzene in N_2	9.46	-4.60	E
			Benzene in N_2	128	+12.5	
80	F	Plywood/veneer drying	Propylene in N_2	14.8	-4.70	E
			Propylene in N_2	328	+4.40	
			Toluene in N_2	430	-0.80	
81	P	Plywood/veneer drying	Propylene in N_2	20.3	+18.2	E
			Propylene in N_2	479	-22.5	
			Toluene in N_2	487	+32.5	
82	J	Polypropylene manufacturing	Propylene in N_2	9.63	-0.35	E
			Propane in N_2	19.7	+0.84	
			Propane in N_2	296	+0.45	
83	I	Coke oven	Hydrogen sulfide in N_2	437	+4.90	E
			Hydrogen sulfide in N_2	647	-16.5	
			Carbonyl sulfide	101	+1.98	

TABLE 2. SUMMARY OF PERFORMANCE AUDIT RESULTS (Continued)

Audit No.	Client***	Industry	Audit material	RTI audit conc. (ppm)	Client audit % bias (Avg.)*	Status of audit**
84	J	Compliance testing	Benzene in N_2	7.45	23.0	E
			Hexane in N_2	72.6	0.6	
			Toluene in N_2	15.0	-8.7	
			Methyl mercaptan in N_2	5.40	NA	
85	I	Steel manufacturing	Hydrogen sulfide in N_2	647	5.0	E
			Carbonyl sulfide in N_2	9.08	1.0	
86	I	Oil shale	Hydrogen sulfide in N_2	437	-3.0	E
			Carbonyl sulfide in N_2	117	-4.6	
			Methyl mercaptan in N_2	8.42	-13.3	
87	Q	Maleic Anhydride Production	Benzene in N_2	55.7	+528.4	E
			Hexane in N_2	324	+20.5	
88	R	Refining	Hydrogen sulfide in N_2	17.5	21.1	E
			Hydrogen sulfide in N_2	437	22.0	
89	Air Quality Bureau, New Mexico	Refining	Hydrogen sulfide in N_2	647	NA	F
90	S	Oil shale	Carbonyl sulfide in N_2	117	-29.1	E
			Methyl mercaptan in N_2	8.42	-14.8	
			Hydrogen sulfide in N_2	437	-3.65	
91	F	Compliance testing & demonstration	Trichlorethylene in N_2	94.6	NA	E
			Propane in N_2	10.0	NA	
			Propane in N_2	309	-54.0	
			Propane in N_2	73.8	8.7	

TABLE 2. SUMMARY OF PERFORMANCE AUDIT RESULTS (Continued)

Audit No.	Client***	Industry	Audit material	RTI audit conc. (ppm)	Client audit % bias (Avg.)*	Status of audit**
92	EPA, Region I	Research Method Development	Toluene in N_2	347	NA	F
93	D	Method Validation	Hydrogen sulfide in N_2	8.32	NA	F
94	USEPA, Region I	Research-Method Development	Vinyl chloride in N_2	8.39	-20.2	E
			1,1-dichloroethylene in N_2	14.2	+10.6	
			Trichloroethylene in N_2	13.5	+55.6	
			Perchloroethylene in N_2	7.94	+48.1	
95	E	Acrylonitrile Production	Acrylonitrile in N_2	413	NA	E
			Acrylonitrile in N_2	10.8	6.94	
96	USEPA, Region I	Resource Recovery Garbage Burning Emissions	Propane in N_2	10.0	-35.0	E
			Propane in N_2	296	-17.2	
97	Tewksbury State Hospital, MA	Research-Method Development	Vinyl chloride in N_2	8.39	+57	E
			1,1-dichloroethylene in N_2	14.2	-9.9	
			Trichloroethylene in N_2	13.5	-4.4	
			Tetrachloroethylene in N_2	7.94	+48.6	
98	T	Plywood Veneer	Method 25 gas in N_2	102	NA	E
			Method 25 gas in N_2	1940	NA	
99	U	Hazardous Materials Incineration	Trichloroethylene in N_2	8.91	NA	F
			Perchloroethylene in N_2	7.94	NA	
			Chloroform in N_2	16.5	NA	

TABLE 2. SUMMARY OF PERFORMANCE AUDIT RESULTS (Continued)

Audit No.	Client***	Industry	Audit material	RTI audit conc. (ppm)	Client audit % bias (Avg.)*	Status of audit**
100	USEPA, Region I	Research Method Development	Chlorobenzene in N_2	9.20	NA	F
			Benzene in N_2	128	NA	
			Hexane in N_2	30.2	NA	
			Meta-xylene in N_2	6.82 (cold bulb)	NA	
				2.68 (warm bulb)		
101	U	Hazardous Materials Incineration	Trichloroethylene in N_2	13.5	NA	F
			Perchloroethylene in N_2	14.5	NA	
102	Allegheny County	Source Testing	Toluene in N_2	8.51	NA	F
			Methyl ethyl ketone in N_2	38.7	NA	
			Acrylonitrile in N_2	11.6	NA	
			Methyl isobutyl ketone in N_2	9.49	NA	
103	I	Hazardous Waste Incineration	Vinylidiene chloride in N_2	14.2	12.3	E
104	I	Hazardous Waste Incineration	Vinylidiene chloride in N_2	9.00	10.0	E
105	USEPA, Region VI	Plastics	Vinyl chloride in N_2	8.41	NA	F
106	USEPA, Region VI	Vinyl Chloride Manufacturing	Vinyl chloride in N_2	8.44	NA	F
107	V	Instrument Check	Methyl chloroform in N_2	10.2	+7.8	E
			Perchloroethylene in N_2	7.94	+15.9	
108	Q	Gasoline Terminal	Propane in air	1.18%	-4.2	E
109	P	Chemicals Manufacturing	Toluene in N_2	16.4	17.3	E
			Benzene in N_2	7.3	NA	
			1,2-dichloroethane in N_2	8.1	NA	
110	MD Dept. of Health	Instrument Check	Benzene in N_2	9.64	-6.6	E
			Perchloroethylene in N_2	14.5	+60.1	

TABLE 2. SUMMARY OF PERFORMANCE AUDIT RESULTS (Continued)

Audit No.	Client***	Industry	Audit material	RTI audit conc. (ppm)	Client audit % bias (Avg.)*	Status of audit**
111	V	Instrument Check	Chloroform in N_2	16.5	+3	E
			Carbon tetrachloride in N_2	10.5	+33.0	
			Trichloroethylene in N_2	13.5	+4.0	
			Freon 113 in N_2	9.76	0	
112	J	Research, Method Development	Propane in N_2	628	+0.6	E
			Toluene in N_2	347	+2.0	
113	GA State EPA	Plastics	Vinyl chloride in N_2	8.44	+10.2	E
114	Sacremento County, California	Instrument Check	Ethylene oxide in N_2	10.1	NA	F
115	W	Instrument Check	Benzene in N_2	389	-35.7	E
			Chlorobenzene in N_2	9.20	-43.1	
116	V	Instrument Check	Methanol in N_2	55.2	NA	F
117	X	Carbon Adsorption	Toluene in N_2	16.1	NA	F
			Methyl ethyl ketone in N_2	38.7	NA	
			Methylene chloride in N_2	9.67	NA	
118	F	VOC Monitoring	Method 25 gas in N_2	96.8 as C	+127.3	E
119	K	VOC Monitoring	Freon 113 in N_2	9.76	NA	F
120	Z	VOC Monitoring	Toluene in N_2	8.51	+38.8	E
			Toluene in N_2	558	-3.1	
121	K	VOC Monitoring	Perchloroethylene in N_2	NA	F	
122	LA State EPA	VOC Monitoring	Benzene in N_2	9.64	-30.5	E
			Vinyl chloride in N_2	8.44	191.5	
			1,2-dichloroethane in N_2	13.8	-37.0	
			Carbon tetrachloride in N_2	10.5	-40.0	
123	C	Paper Manufacturing	Vinyl chloride in N_2	6.60	NA	F

TABLE 2. SUMMARY OF PERFORMANCE AUDIT RESULTS (Continued)

Audit No.	Client***	Industry	Audit material	RTI audit conc. (ppm)	Client audit % bias (Avg.)*	Status of audit**
124	LA State EPA	Instrument Check	Toluene in N_2	8.51	-34.2	E
			Methylene chloride in N_2	9.67	96.8	
125	Y	VOC Monitoring	Method 25 gas in N_2	107	80.4	E
			Method 25 gas in N_2	775	39.5	
126	I	Oil Shale	Carbonyl sulfide in N_2	10.7	NA	F
			Carbonyl sulfide in N_2	116	NA	
			Hydrogen sulfide	627	NA	
			Methyl mercaptan	8.42	NA	
127	F	VOC Monitoring	Method 25 gas in N_2	775 as C	-26.5, -18.7	E
128	Y	VOC Monitoring	Method 25 gas in N_2	205 as C	21.5	E
			Method 25 gas in N_2	1040 as C	18.9	
129	J	Research, Method Development	Methyl ethyl ketone in N_2	38.7		A
130	Region VII	Source Testing	Acrylonitrile in N_2	11.6		A

NA = Not analyzed

$$\text{*Client \% Bias} = 100 \times \frac{\text{Client-Measured Concentration} - \text{RTI-Measured Concentration}}{\text{RTI-Measured Concentration}}$$

**Status Codes:
A = Cylinder shipped; audit results not yet received;
B = Audit results received;
C = Audit report submitted to EPA;
D = Audit results received, audit report submitted to EPA, cylinder not yet returned by client;
E = Audit complete;
F = Audit completed without analysis of audit materials by client.

***Whenever the auditee is known, an alphabetical letter is shown. Whenever the auditee is unknown, the name of the agency requesting the audit is shown.

1977 - Audits 1-8
1978 - Audits 9-28
1979 - Audits 29-49
1980 - Audits 50-75
1981 - Audits 76-82
1982 - Audits 83-86
1983 - Audits 87-106
1984 - Audits 107-130

SECTION 4.0
STABILITY STUDIES

An ideal calibration standard or audit material should be stable over its total time of usage. Any change or instability should be less than the measurement error tolerated during its use. The stabilities of the compounds in the repository are being studied through periodic analysis of the cylinder contents. Assessment of stabilities could be improved considerably by increasing the frequency of the analyses, however, this increase is beyond the scope and financial limits of this project. The primary objective of this project is to conduct performance audits during source testing to assess the relative accuracy of the analytical results. Stability studies are of secondary importance.

In this project, the gas mixtures in the repository are initially analyzed upon receipt from the specialty gas vendor to corroborate the vendor's analysis. If the RTI analysis result differs from the vendor's value by more than 10 percent, the cylinder is given to a third party (EPA or NBS) for analysis. The gas mixtures are again analyzed at 1 month, at 2 months, and at one year following the initial analysis to determine the stability of the gas mixtures. In some cases, analyses are not performed on the dates specified above; however, every attempt is made to acquire the data on this schedule. Cylinder concentrations are also usually determined prior to each performance audit, providing additional data for use in stability studies.

As the number of analyses per cylinder increases, statistical stability analyses will be performed. These statistical analyses will include testing models other than the linear regression model. Such models are needed especially where the change is rapid at first but later becomes slow or nonexistent. The results will be presented in a future report. Statistical stability analyses for ten (10) halocarbons and eight (8) other organics were recently published in the open literature (1,2).

Absolute accuracies of the cylinder analyses have not been determined due to lack of NBS-SRMs as standards for most of the organic gas

mixtures. Recently NBS has issued SRMs for tetrachloroethylene and is in the process of certifying a 4-component SRM containing aromatic species (benzene, toluene, chlorobenzene, and bromobenzene) and a 4-component SRM containing aliphatic species (chloroform, carbon tetrachloride, tetrachloroethylene and vinyl chloride). Once these NBS-SRMs are available, they will be used in the future to estimate the absolute accuracy. Absolute accuracy could also be estimated by performing the analyses using several different analytical methods or by having a relatively large number of laboratories perform analyses on the same cylinders; both of these approaches are beyond the financial limits of this project. An examination of the data in Attachment 1 shows values for individual cylinder analyses usually vary by less than 10 percent for 4-8 analyses over 2-6 years. This variation indicates changes in cylinder contents (i.e., instability) and the imprecision of the measurement process. The possible sources of experimental error that could result in apparent changes in concentrations include (1) the variability of the analytical technique used for analysis, (2) stability of and/or accuracy of calibration standards, and (3) the accuracy of reproducing standards for which NBS-SRMs do not exist. Each of these sources of variability contributes to the net uncertainty of the resulting data presented in Attachment 1. Estimates of day-to-day measurement uncertainty (repeatability) for all compounds have not been performed due to financial limits of this project. However, the measurement uncertainties for four halocarbons were recently published (2). The measurement uncertainty varied from <1 to 10 percent depending on the compound, and the major portion of the uncertainity was attributed to the method of preparation of the calibration standard. The uncertainty for the gas chromatographic analysis was determined to be less than 2 percent by multiple injections of the gas during same day analysis.

In some cases, the cylinder contents were lost after only a few audits. The possible reasons include leakage during storage or shipping, misuse, multiple use in audits or initial low pressure in the cylinder.

SECTION 5.0
SUMMARY AND CONCLUSIONS

Cylinder gases of hydrocarbons, halocarbons, and sulfur containing organic species have been used successfully as audit materials to assess the relative accuracy of gas chromatographic systems used to measure source emissions. Absolute accuracy has not been determined because of lack of well characterized standards for most of the gas mixtures; instead an estimated interlaboratory bias has been reported for the performance audits conducted during source testing. This interlaboratory bias has been generally within 15 percent for both low and high concentration gases (Table 2).

Of the 45 gaseous compounds studied or currently under study, 37 have demonstrated sufficient stability in cylinders to be used further as audit materials. Five compounds (ethylamine, paradichlorobenzene, cyclohexanone, 1,2-dibromoethylene, and aniline) are not recommended as audit materials for various reasons as discussed in Attachment 1. One gaseous compound (formaldehyde) was ordered but the speciality gas manufacturer indicated that cylinder gases of this compound could not be prepared. Two compounds (ethylene dibromide and 1,1,2,2 tetrachloroethane) have been recently ordered; therefore, their stabilities are unknown at this time. Detailed statistical analyses which would separate statistical deviations from true concentration changes with time are in progress and will be presented in a future report.

REFERENCES

1. R. K. M. Jayanty, C. Parker, C. E. Decker, W. F. Gutknecht, J. E. Knoll and D. J. VonLehmden, "Quality Assurance for Emissions Analysis Systems," Environmental Science and Technology, 17 (6), 257-263A (1983).

2. G. B. Howe, R. K. M. Jayanty, A. V. Rao, W. F. Gutknecht, C. E. Decker and D. J. VonLehmden, "Evaluation of Selected Gaseous Halocarbons for Use in Source Test Performance Audits," J. of Air Pollution Control Association, 33 (9), 823-826 (1183).

ATTACHMENT 1

Stability Data
as of
August 1984

1.0 BENZENE STABILITY STUDY

2.0 ETHYLENE STABILITY STUDY

3.0 PROPYLENE STABILITY STUDY

4.0 METHANE/ETHANE STABILITY STUDY

5.0 PROPANE STABILITY STUDY

6.0 TOLUENE STABILITY STUDY

7.0 HYDROGEN SULFIDE STABILITY STUDY

8.0 META-XYLENE STABILITY STUDY

9.0 METHYL ACETATE STABILITY STUDY

10.0 CHLOROFORM STABILITY STUDY

11.0 CARBONYL SULFIDE STABILITY STUDY

12.0 METHYL MERCAPTAN STABILITY STUDY

13.0 HEXANE STABILITY STUDY

14.0 1,2-DICHLOROETHANE STABILITY STUDY

15.0 CYCLOHEXANE STABILITY STUDY

16.0 METHYL ETHYL KETONE STABILITY STUDY

17.0 METHANOL STABILITY STUDY

18.0 1,2-DICHLOROPROPANE STABILITY STUDY

19.0 TRICHLOROETHYLENE STABILITY STUDY

20.0 1,1-DICHLOROETHYLENE STABILITY STUDY

21.0 1,2-DIBROMOETHYLENE STABILITY STUDY

22.0 PERCHLOROETHYLENE STABILITY STUDY

23.0 VINYL CHLORIDE STABILITY STUDY

24.0 1,3-BUTADIENE STABILITY STUDY

25.0 ACRYLONITRILE STABILITY STUDY

26.0 ANILINE STABILITY STUDY

27.0 METHYL ISOBUTYL KETONE STABILITY STUDY

28.0 CYCLOHEXANONE STABILITY STUDY

29.0 PARADICHLOROBENZENE STABILITY STUDY

30.0 ETHYLAMINE STABILITY STUDY

31.0 FORMALDEHYDE STABILITY STUDY

32.0 METHYLENE CHLORIDE STABILITY STUDY

33.0 CARBON TETRACHLORIDE STABILITY STUDY

34.0 FREON 113 STABILITY STUDY

35.0 METHYL CHLOROFORM STABILITY STUDY

36.0 ETHYLENE OXIDE STABILITY STUDY

37.0 PROPYLENE OXIDE STABILITY STUDY

38.0 ALLYL CHLORIDE STABILITY STUDY

39.0 ACROLEIN STABILITY STUDY

40.0 CHLOROBENZENE STABILITY STUDY

41.0 CARBON DISULFIDE STABILITY STUDY

42.0 METHOD 25 GAS MIXTURE

43.0 ETHYLENE DIBROMIDE

44.0 1,1,2,2-TETRACHLOROETHANE

1.0 BENZENE STABILITY STUDY

Cylinder No. / Cylinder Construction*		1A Al	1B Al	1C Al	1D Al	1E S	1F S	1G S
Manufacturer Concentration	ppm	65.4	324	200	117	61.0	71.0	80.0
	Date	7/27/77	7/27/77	7/27/77	7/27/77	2/10/78	2/10/78	2/10/78
	ppm	(79.0)	(374)	(241)	(136)	(62.0)	(71.0)	(80.0)
	Day	136	136	247	29	78	232	78
	ppm	(74.0)	(337)	(216)	(144)	(62.0)	(73.0)	(81.0)
RTI Concentration	Day	156	156	252	157	216	385	216
	ppm	(78.0)	(350)	(215)	(134)	(61.0)	(75.0)	(81.0)
	Day	167	167	381	252	385	586	385
	ppm	(80.0)	(355)	(218)	(129)	(65.0)	(74.5)	(84.0)
	Day	630	402	**	290	722	882	504
	ppm	(77.9)	(331)		(127)	(66.9)	(75.7)	(85.4)
	Day	**	433		414	1337	1292	1292
	ppm		(343)		(127)	(55.7)	(65.7)	(74.0)
	Day		969		1247	1858	2246	2246
	ppm		(358)		(132)	(58.7)	(70.0)	(78.3)
	Day		1274		2438	2246		
	ppm		(348)		(121)	(60.4)		
	Day		1491					
	ppm		(324)					
	Day		2056					
	ppm		(305)					
	Day		2438					
	ppm		(319)					

*Al = Aluminum; S = Steel; LS = Low-Pressure Steel.

**Cylinder empty.

ANALYTICAL CONDITIONS: Flame ionization detector, 10% OV-101 on Chromosorb W-P column at 60°.

CALIBRATION: Reagent-grade "Benzene" liquid is used as a standard. Glass-bulb dilution technique is used for making the series of standards for calibration.

Cylinder No.		1H	1I	1J	IK	IL	IM	IN
Cylinder Construction*		S	S	S	S	S	S	S
Manufacturer Concentration	ppm	100	139	232	265	296	326	344
	Date	2/8/78	2/9/78	2/9/78	2/9/78	2/9/78	2/9/78	2/9/78
	ppm	(101)	(139)	(229)	(264)	(295)	(319)	(332)
	Day	65	49	233	49	49	49	49
	ppm	(102)	(139)	(237)	(261)	(292)	(316)	(327)
RTI	Day	206	50	386	50	51	51	54
Concentration	ppm	(98.0)	(142)	(243)	(268)	(294)	(318)	(342)
	Day	237	96	557	69	93	96	69
	ppm	(101)	(139)	(225)	(254)	(298)	(323)	(335)
	Day	434	127		84	205	433	809
	ppm	(105)	(140)		(269)	(294)	(345)	(342)
	Day	773	205		**	237	830	**
	ppm	(106)	(138)			(302)	(335)	
	Day	831	505			809	1294	
	ppm	(100)	(147)			(295)	(320)	
	Day	1294	1293			1294	2379	
	ppm	(92.0)	(128)			(290)	(310)	
	Day	2380	1338			2379		
	ppm	(96.0)	(128)			(285)		
	Day		2380					
	ppm		(134)					

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

**Cylinder empty.

1.0 BENZENE STABILITY STUDY (Continued)

Cylinder No. / Cylinder Construction*		1O S	1P S	1Q S	1R S	1S S	1T S	1U S
Manufacturer Concentration	ppm	389	8.04	9.85	9.89	9.93	10.0	10.9
	Date	2/9/78	4/21/78	4/21/78	4/21/78	4/21/78	4/21/78	4/21/78
	ppm	(387)	(8.37)	(9.99)	(10.0)	(10.0)	(10.7)	(11.5)
	Day	64	4	5	4	4	25	4
	ppm	(369)	(8.33)	(9.88)	(10.1)	(10.1)	(10.2)	(10.7)
RTI Concentration	Day	205	25	25	13	26	146	25
	ppm	(396)	(8.20)	(10.1)	(9.73)	(9.80)	(9.20)	(10.8)
	Day	809	26	332	332	56	362	332
	ppm	(396)	(8.34)	(9.71)	(9.77)	(9.50)	(9.90)	(10.7)
	Day	1294	56		1018	146	1222	434
	ppm	(389)	(8.19)		(9.46)	(8.90)	(9.56)	(10.9)
	Day	2247	134		1270	628	**	759
	ppm	(376)	(7.81)		(9.64)	(9.57)		(10.2)
	Day		434			738		1222
	ppm		(8.21)			(9.45)		(9.69)
	Day		766			**		2175
	ppm		(7.93)					(9.90)
	Day		1222					
	ppm		(7.68)					
	Day		2175					
	ppm		(7.90)					

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

**Cylinder empty.

Cylinder No.		1V	1W	1X	1Y	1Z	1AA	1AB
Cylinder Construction*		S	S	S	S	S	S	S
Manufacturer Concentration	ppm	12.2	8.09	11.0	11.2	8.09	9.14	270
	Date	4/25/78	5/19/78	5/4/78	5/4/78	5/4/78	5/4/78	7/27/77
	ppm	(12.7)	(8.10)	(11.2)	(10.9)	(8.20)	(9.10)	(300)
	Day	1	105	132	132	132	132	29
	ppm	(12.5)	(7.70)	(10.2)	(9.90)	(7.04)	(7.80)	(319)
RTI	Day	21	287	**	302	302	302	157
Concentration	ppm	(12.3)	(8.10)		(10.7)	(7.70)	(8.50)	(312)
	Day	109	488		393	473	1005	2056
	ppm	(12.0)	(8.20)		(10.8)	(7.54)	(8.17)	(305)
	Day	358	784		2162		1209	
	ppm	(12.1)	(8.30)		(10.3)		(8.42)	
	Day	755	1194				2162	
	ppm	(12.0)	(7.45)				(8.40)	
	Day	1218	2147					
	ppm	(11.9)	(7.80)					

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

**Cylinder empty.

2.0 ETHYLENE STABILITY STUDY

Cylinder No. / Cylinder Construction*		2A Al	2B Al	2C Al	2D Al	2E Al	2F Al	2G Al
Manufacturer Concentration	ppm	2920	3000	4960	4970	19900	19900	4.95
	Date	2/23/78	2/23/78	2/23/78	2/23/78	2/24/78	2/24/78	4/27/78
	ppm	(3070)	(3130)	(5210)	(5200)	(20400)	(20600)	(4.70)
RTI Concentration	Day	49	49	48	48	48	48	29
	ppm	(3120)	(3180)	(5340)	(5280)	(20800)	(20800)	(4.70)
	Day	198	198	201	201	200	200	106
	ppm	(2880)	(2940)	(4660)	(4910)	(20200)	(20300)	(4.85)
	Day	809	809	809	809	808	808	741
	ppm	(3200)	(3270)	(5380)	(5340)	(18900)	(19000)	(4.62)
	Day	2291	2291	2291	2291	2290	2290	1180
	ppm	(3280)	(3350)	(5520)	(5480)	(20600)	(20700)	(5.12)
	Day							2224
	ppm							(4.50)

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

ANALYTICAL CONDITIONS: Flame Ionization detector, Durapak n-octane on Porasil C column at 30 degrees Celsius.

CALIBRATION: NBS-SRM Propane is used for standard calibration.

2.0 ETHYLENE STABILITY STUDY (Continued)

Cylinder No. / Cylinder Construction*		2H Al	2I Al	2J Al	2K Al	2L Al	2M Al	2N Al
Manufacturer Concentration	ppm	10.0	15.0	19.9	300	448	603	701
	Date	4/27/78	4/28/78	4/28/78	4/28/78	4/28/78	4/28/78	4/28/78
	ppm	(9.70)	(14.4)	(19.2)	(306)	(468)	(629)	(740)
RTI Concentration	Day	29	28	28	33	33	34	34
	ppm	(9.60)	(14.4)	(19.3)	(319)	(493)	(646)	(749)
	Day	106	104	104	105	104	104	104
	ppm	(9.90)	(14.9)	(20.3)	(312)	(473)	(636)	(737)
	Day	740	739	739	728	740	740	740
	ppm	(8.40)	(18.0)	(27.5)	(300)	(457)	(606)	(703)
	Day	1180	1179	1179	2225	2225	2225	2225
	ppm	(10.0)	(14.4)	(18.9)	(291)	(435)	(583)	(678)
	Day	2224	2223	2223				
	ppm	(9.50)	(14.2)	(18.9)				

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

3.0 PROPYLENE STABILITY STUDY

Cylinder No.		3A	3B	3C	3D	3E	3F	3G	3H
Cylinder Construction*		Al	Al	Al	Al	Al	Al	Al	Al
Manufacturer Concentration	ppm	4.94	9.91	14.8	20.0	298	446	585	683
	Date	4/27/78	4/27/78	4/27/78	4/27/78	4/27/78	4/27/78	4/27/78	4/27/78
	ppm	(4.86)	(9.83)	(14.6)	(19.8)	(296)	(442)	(577)	(672)
	Day	26	26	26	27	27	27	27	27
	ppm	(4.94)	(9.85)	(14.5)	(19.0)	(286)	(428)	(560)	(655)
RTI	Day	27	104	104	104	104	105	104	105
Concentration	ppm	(4.78)	(10.3)	(14.8)	(20.0)	(317)	(474)	(629)	(729)
	Day	104	749	749	749	750	750	750	750
	ppm	(4.98)	(9.76)	(14.8)	(20.3)	(324)	(479)	(620)	(721)
	Day	749	1250	**	2229	820	2229	2229	820
	ppm	(4.93)	(9.63)		(19.7)	(328)	(444)	(579)	(725)
	Day	2229	2229			**			2229
	ppm	(4.80)	(9.80)						(676)

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

ANALYTICAL CONDITIONS: Flame ionization detector, Durapak n-octane on Porasil C column at 30 degrees Celsius.

CALIBRATION: NBS-SRM Propane is used for standard calibration.

4.0 METHANE/ETHANE STABILITY STUDY

Cylinder No.		4A		4B		4C		4D	
Cylinder Construction*		Al		Al		Al		Al	
Audit Material**		M	E	M	E	M	E	M	E
Manufacturer Concentration	ppm	6000	714	8130	597	1000	295	1670	202
RTI Concentration	Date	7/21/78	7/21/78	7/21/78	7/21/78	7/21/77	7/21/77	7/21/77	7/21/77
	ppm	(6210)	(773)	(8130)	(654)	(1020)	(315)	(1710)	(220)
	Day	264	163	35	35	264	163	35	29
	ppm	(5980)	(715)	(7550)	(663)	(983)	(292)	(1560)	(218)
	Day	662	264	264	163	1027	264	264	157
	ppm	(6580)	(684)	(7820)	(606)	(1290)	(283)	(1640)	(202)
	Day	2145	662	662	264	2510	1027	1027	258
	ppm	(6460)	(703)	(8590)	(577)	(300)	(284)	(1950)	(195)
	Day		2145	2145	662		2510	2510	1027
	ppm		(730)	(8430)	(598)		(300)	(1770)	(206)
	Day				2145				2510
	ppm				(619)				(207)

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

**M = Methane; E = Ethane.

ANALYTICAL CONDITIONS: Flame ionization detector, Durapak n-octane on Porasil C column at 30 degrees celsius.

CALIBRATION: NBS-SRM methane is used for standard calibration.

5.0 PROPANE STABILITY STUDY

Cylinder No.		5A	5B	5C	5D	5E	5F	5G	5H
Cylinder Construction*		Al	Al	Al	Al	Al	Al	Al	Al
Manufacturer Concentration	ppm	5.01	10.0	14.6	20.0	303	439	604	708
	Date	4/25/78	4/25/78	4/25/78	4/25/78	4/26/78	4/26/78	4/26/78	4/27/78
	ppm	(4.90)	(9.70)	(14.3)	(19.5)	(304)	(441)	(615)	(730)
	Day	24	24	25	25	24	24	27	26
	ppm	(4.90)	(9.80)	(14.5)	(19.8)	(301)	(436)	(615)	(723)
RTI	Day	108	108	108	108	107	107	107	106
Concentration	ppm	(5.10)	(10.1)	(14.9)	(20.3)	(305)	(440)	(607)	(710)
	Day	605	513	582	582	530	530	604	603
	ppm	(4.89)	(10.6)	(15.0)	(20.8)	(316)	(450)	(613)	(718)
	Day	729	752	736	736	581	581	735	734
	ppm	(5.20)	(10.0)	(14.7)	(20.1)	(316)	(453)	(628)	(734)
	Day		914	2220	1252	735	728	2218	2218
	ppm		(10.0)	(14.8)	(19.7)	(313)	(472)	(607)	(715)
	Day		2220		2220	752			
	ppm		(10.9)		(20.0)	(314)			
	Day					913			
	ppm					(309)			
	Day					1251			
	ppm					(296)			
	Day					2219			
	ppm					(308)			

*Al = Aluminum; S = Steel, LS = Low Pressure Steel.

ANALYTICAL CONDITIONS: Flame ionization detector, Durapak n-octane on Porasil C column at 30 degrees Celsius.

CALIBRATION: NBS-SRM Propane is used for standard calibration.

5.0 PROPANE STABILITY STUDY (Continued)

Cylinder No.		5I	5J	5K	5L
Cylinder Construction*		Al	Al	Al	Al
Manufacturer Concentration	ppm	1000	2000	10,000	20,000
RTI Concentration	Date	3/3/83	3/3/83	3/3/83	3/3/83
	ppm	(1270)	(2100)	(11800)	(20100))
	Day	452	452	452	452
	ppm	(1070)	(2180)	(13000)	(21000)

*Al = Aluminum; S = Steel, LS = Low Pressure Steel.

ANALYTICAL CONDITIONS: Flame ionization detector, Durapak n-octane on Porasil C column at 30 degrees Celsius.

CALIBRATION: NBS-SRM Propane is used for standard calibration.

6.0 TOLUENE STABILITY STUDY

Cylinder No. / Cylinder Construction*		6A LS	6B LS	6C S	6D S	6E S	6F S
Manufacturer Concentration	ppm	408	606	16.2	9.11	9.00	430
	Date	12/6/78	12/6/78	10/3/78	10/3/78	3/29/83	7/1/80
	ppm	(405)	(585)	(17.3)	(9.62)	(8.5)	(430)
RTI Concentration	Day	3	3	48	64		1505
	ppm	(405)	(579)	(14.9)	(8.50)		(427)
	Day	86	86	365	66		
	ppm	(394)	(577)	(15.0)	(8.60)		
	Day	100	358	1373	160		
	ppm	(393)	(615)	(14.8)	(8.20)		
	Day	**	2079	**	**		
	ppm		(663)				

*Al = Aluminum, S = Steel, LS = Low Pressure Steel.

**Cylinder empty.

ANALYTICAL CONDITIONS: Flame ionization detector, 10% OV-101 Chromosorb WHP column at 60 degrees Celsius.

CALIBRATION: Reagent grade "Toluene" liquid is used as a standard. "Glass bulb" technique is utilized for generation of series of standards for calibration.

6.0 TOLUENE STABILITY STUDY (Continued)

Cylinder No.		6G	6H	6I	6J	6K	6L
Cylinder Construction**		Al	Al	Al	Al	LS	LS
Manufacturer Concentration	ppm	16.0	10.0	10.0	20.0	200	300
RTI Concentration	Date	7/27/83	7/1/80	*	*	*	*
	ppm	(16.1)	(8.50)				
	Day	383	1505				
	ppm	(19.1)***	(9.40)				

*Cylinders were ordered but not yet received. Manufacturer concentrations are nominal concentrations

**Al = Aluminum, S = Steel, LS = Low Pressure Steel.

***Questionable value.

ANALYTICAL CONDITIONS: Flame ionization detector, 10% OV-101 Chromosorb WHP column at 60 degrees Celsius.

CALIBRATION: Reagent grade "Toluene" liquid is used as a standard. "Glass bulb" technique is utilized for generation of series of standards for calibration.

7.0 HYDROGEN SULFIDE STABILITY STUDY

Cylinder No. / Cylinder Construction*		7A Al	7B Al	7C Al	7D Al	7E Al	7F Al	7G Al
Manufacturer Concentration	ppm	399	9.15	16.7	649	6.95	6.45	671
	Date	10/1/78	7/7/78	10/1/78	10/1/78	10/1/78	10/1/78	3/2/83
	ppm	(371)	(9.73)	(16.1)	(641)	(7.05)	(4.94)	(628)
RTI Concentration	Day	38	87	38	38	87	38	
	ppm	(424)	(6.72)	(16.5)	(655)	(5.75)	(5.14)	
	Day	111	124	111	111	124	111	
	ppm	(414)	(7.11)	(15.7)	(690)	(5.62)	(4.81)	
	Day	1030	197	580	1030	197	580	
	ppm	(437)	(6.36)	(16.2)	(647)	(5.23)	(4.35)	
	Day		696	1030		696	1030	
	ppm		(6.23)	(17.5)	**	(5.14)	(3.71)	
	Day		1116			1116		
	ppm		(8.32)			(5.38)		

*Al = Aluminum, S = Steel, LS = Low Pressure Steel.

**Cylinder empty.

ANALYTICAL CONDITIONS: Flame ionization detector, 10% OV-101 Chromosorb WHP column at 60 degrees Celsius.

CALIBRATION: Reagent grade pure "Hydrogen sulfide" gas is used as a standard. Dilutions are made in a Tedlar bag for generation of series of standards for calibration.

ANALYTICAL PROBLEMS: Only a Teflon® column and Teflon® lines should be used. The air-to-hydrogen ratio is critical to the sensitivity of the FPD.

7.0 HYDROGEN SULFIDE STABILITY STUDY (Continued)

Cylinder No.	7H	7I	7J	7K	7L	7M	7N	7O
Cylinder Construction**	Al	Al	Al	Al	Al	Al	Al	Al
Manufacturer ppm Concentration	20	30	40	100	200	300	400	500
RTI Concentration	*	*	*	*	*	*	*	*

*Cylinders were ordered but not yet received. Manufacturer concentrations are nominal concentrations.

**Al = Aluminum, S = Steel, LS = Low Pressure Steel.

ANALYTICAL CONDITIONS: Flame ionization detector, 10% OV-101 Chromosorb WHP column at 60 degrees Celsius.

CALIBRATION: Reagent grade pure "Hydrogen sulfide" gas is used as a standard. Dilutions are made in a Tedlar bag for generation of series of standards for calibration.

ANALYTICAL PROBLEMS: Only a Teflon® column and Teflon® lines should be used. The air-to-hydrogen is ratio critical to the sensitivity of the FPD.

8.0 M-XYLENE STABILITY STUDY

Cylinder No. / Cylinder Construction*		8A LS	8B LS	8C S	8D S
Manufacturer Concentration	ppm	405	613	17.3	7.33
	Date	10/5/78	10/5/78	10/5/78	10/5/78
	ppm	(480)	(720)	(16.6)	(6.20)
	Day	63	63	63	63
	ppm	(445)	(676)	(17.2)	(6.81)
RTI Concentration	Day	158	158	166	166
	ppm	(425)	(656)	(20.8)	(6.82)
	Day	412	606	302	1036
	ppm	(487)	(760)	(16.4)	(5.66)
	Day	606	2140	1036	
	ppm	(507)	(598)	(19.0)	

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

CALIBRATION: Reagent grade "M-Xylene" liquid is used. "Glass bulb" technique is used for generation of series of standards for calibration.

ANALYTICAL CONDITIONS: Flame ionization detector, 10% OV-101 on Chromosorb WHP column at 60, 120 or 140 degrees Celsius.

9.0 METHYL ACETATE STABILITY STUDY

Cylinder No. Cylinder Construction*		9A S	9B S	9C S	9D S
Manufacturer Concentration	ppm	326	455	6.84	17.2
	Date	10/13/78	10/13/78	10/13/78	10/13/78
	ppm	(271)	(428)	(5.29)	(12.9)
RTI	Day	230	230	230	230
Concentration	ppm	(340)	(437)	(4.86)	(12.5)
	Day	286	286	286	286
	ppm	(324)	(442)	(5.02)	(11.8)
	Day	629	629	630	630
	ppm	(348)	(479)	(5.88)	(12.5)

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

ANALYTICAL CONDITIONS: Flame ionization detector, 10% OV-275 on Chromosorb WHP column at 50 degrees Celsius.

CALIBRATION: Reagent grade "Methyl acetate" liquid is used as a standard. "Glass bulb" technique is utilized for generation of series of standards for calibration.

10.0 CHLOROFORM STABILITY STUDY

Cylinder No. / Cylinder Construction*		10A S	10B S	10C S	10D S
Manufacturer Concentration	ppm	520	348	8.70	16.9
	Date	10/17/78	10/17/78	10/17/78	10/17/78
	ppm	(529)	(345)	(8.08)	(17.6)
RTI	Day	161	161	161	161
Concentration	ppm	(515)	(351)	(7.39)	(16.5)
	Day	256	256	256	256
	ppm	(514)	(340)	(7.50)	(16.2)
	Day	553	975	553	553
	ppm	(531)	(325)	(8.11)	(16.5)
		**			

*Al = Aluminum; S = Steel; LS = Low Pressure.

**Cylinder empty.

ANALYTICAL CONDITIONS: Flame ionization detector, 10% OV-101 on Chromosorb WHP column at 50 or 100 degrees Celsius.

CALIBRATION: Reagent grade "Chloroform" liquid is used as a standard. "Glass bulb" technique is utilized for generation of series of standards for calibration.

11.0 CARBONYL SULFIDE STABILITY STUDY

Cylinder No.		11A	11B	11C	11D	11E	11F
Cylinder Construction*		S	S	S	S	AL	AL
Manufacturer Concentration	ppm	251	100	9.96	7.03	9.54	101
	Date	11/3/78	11/3/78	11/3/78	11/3/78	9/18/81	9/18/81
	ppm	(276)	(109)	(9.10)	(6.81)	(12.9)	(111)
RTI Concentration	Day	78	78	78	78		
	ppm	(281)	(111)	(8.66)	(6.48)		
	Day	185	185	185	185		
	ppm	(275)	(95.0)	(8.23)	(6.41)		
		**	**	**	**		

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

**Cylinder empty.

ANALYTICAL CONDITIONS: Flame photometric detector, Carbopak B column at 50 degrees Celsius or Chromosil 330 column at 60 degrees Celsius.

CALIBRATION: Reagent grade pure "Carbonyl Sulfide" gas is used as a standard. Dilutions are made in Tefion® bag for generation of series of standards for calibration.

ANALYTICAL PROBLEMS: Only a Tefion column and Tefion lines should be used. The air-to-hydrogen ratio is critical to the sensitivity of the FPD.

11.0 CARBONYL SULFIDE STABILITY STUDY (Continued)

Cylinder No.		11G	11H	11I
Cylinder Construction**		Al	Al	Al
Manufacturer Concentration	ppm	100	200	400
RTI Concentration		*	*	*

*Cylinders were ordered but not yet received. Manufacturer concentrations are nominal concentrations.

**Al = Aluminum; S = Steel; LS = Low Pressure Steel.

ANALYTICAL CONDITIONS: Flame photometric detector, Carbopak B column at 50 degrees Celsius or Chromosil 330 column at 60 degrees Celsius.

CALIBRATION: Reagent grade pure "Carbonyl Sulfide" gas is used as a standard. Dilutions are made in Teflon® bag for generation of series of standards for calibration.

ANALYTICAL PROBLEMS: Only a Teflon column and Teflon lines should be used. The air-to-hydrogen ratio is critical to the sensitivity of the FPD.

12.0 METHYL MERCAPTAN STABILITY STUDY

Cylinder No. / Cylinder Construction*		12A Al	12B Al	12C Al	12D Al
Manufacturer Concentration	ppm	8.03	10.0	3.55	4.22
	Date	1/24/79	1/24/79	1/24/79	1/24/79
	ppm	(5.66)	(7.94)	(3.65)	(4.23)
RTI	Day	104	104	104	104
Concentration	ppm	(5.60)	(8.10)	(3.50)	(4.76)
	Day	139	139	139	139
	ppm	(5.65)	(7.90)	(3.56)	(4.54)
		985	985	985	**
		(5.40)	(8.42)	(3.64)	

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

**Cylinder empty.

ANALYTICAL CONDITIONS: Flame photometric detector, Carbopak B column at 50 degrees Celsius or Chromosil 330 column at 60 degrees Celsius.

CALIBRATION: Reagent grade pure "Methyl mercaptan" gas is used a standard. Dilutions are made in a Teflon® bag for generation of series of standards for calibration.

ANALYTICAL PROBLEMS: Only a Teflon column and Teflon lines should be used. The air-to-hydrogen ratio is a critical variable.

13.0 HEXANE STABILITY STUDY

Cylinder No. / Cylinder Construction*		13A LS	13B LS	13C Al	13D Al	13E Al
Manufacturer Concentration	ppm	1975	2973	30.6	79.2	80.0
RTI Concentration	Date	2/6/79	2/6/79	2/6/79	2/6/79	3/25/83
	ppm	(2170)	(3070)	(30.8)	(82.2)	(83.2)
	Day	6	6	296	296	376
	ppm	(1980)	(2860)	(30.1)	(81.0)	(88.2)
	Day	337	338	337	337	
	ppm	(2070)	(2950)	(30.6)	(81.3)	
	Day	469	469	469	469	
	ppm	(1990)	(3080)	(32.0)	(79.8)	
	Day	1886	1886	523	835	
	ppm	(1990)	(2980)	(30.0)	(80.2)	
	Day			835	12.47	
	ppm			(30.2)	(82.7)	
	Day			1886	**	
	ppm			(32.8)		

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

**Cylinder empty.

ANALYTICAL CONDITIONS: Flame ionization detector, 10% OV-101 on Chromosorb WHP column at 60 or 100 degrees Celsius.

CALIBRATION: Reagent grade "Hexane" liquid is used as a standard. "Glass bulb" technique is utilized for making series of standards for calibration.

14.0 1,2 DICHLOROETHANE STABILITY STUDY

Cylinder No. / Cylinder Construction*		14A Al	14B Al	14C Al	14D Al	14E Al	14F Al	14G Al	14H Al
Manufacturer Concentration	ppm	14.4	9.64	100	526	6.92	12.5	97.9	439
	Date	1/19/79	1/19/79	1/19/79	1/19/79	4/5/79	4/5/79	4/5/79	4/5/79
	ppm	(14.1)	(9.20)	(96.2)	(498)	(10.0)	(15.2)	(102)	(463)
RTI	Day	58	58	58	58	30	30	30	30
Concentration	ppm	(15.2)	(10.8)	(103)	(534)	(9.42)	(14.7)	(105)	(451)
	Day	155	155	155	155	69	69	69	69
	ppm	(14.9)	(10.0)	(98.2)	(524)	(9.30)	(14.3)	(99.0)	(462)
	Day	811	811	501	501	586	811	425	589
	ppm	(14.2)	(9.56)	(87.3)	(592)	(9.14)	(14.5)	(87.3)	(432)
	Day	835	835	920	920	811	835	844	697
	ppm	(13.5)	(9.19)	(102)	(502)	(9.70)	(13.8)	(101)	(451)
	Day	1964	1964	1964	1964	835	1888	1888	844
	ppm	(13.9)	(9.68)	(94.9)	(477)	(9.16)	(13.9)	(92.4)	(453)
	Day								1888
	ppm								(416)

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

ANALYTICAL CONDITIONS: Flame ionization detector, 10% OV-101 on Chromosorb WHP column at 100 degrees Celsius.

CALIBRATION: Reagent grade "1,2 Dichloroethane" liquid is used as a standard. "Glass bulb" technique is utilized for making series of standards for calibration.

15.0 CYCLOHEXANE STABILITY STUDY

Cylinder No.		15A
Cylinder Construction*		Al
Manufacturer Concentration	ppm	99.1
RTI Concentration	Date	3/19/79
	ppm	(106)
	Day	147
	ppm	(93.4)
	Day	394
	ppm	(99.0)
	Day	926
	ppm	(102)
	Day	1966
	ppm	(95.9)

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

ANALYTICAL CONDITIONS: Flame ionization detector, 10% OV-101 on Chromosorb WHP column at 100 degrees Celsius.

CALIBRATION: Reagent grade "Cyclohexane" liquid is used as a standard. "Glass bulb" technique is used for making series of standards for calibration.

16.0 METHYL ETHYL KETONE STABILITY STUDY

Cylinder No.		16A
Cylinder Construction*		S
Manufacturer Concentration	ppm	43.7
	Date	5/23/79
	ppm	(42.3)
RTI	Day	28
Concentration	ppm	(40.0)
	Day	58
	ppm	(39.9)
	Day	380
	ppm	(44.5)
	Day	653
	ppm	(38.7)
	Day	1847
	ppm	(40.4)

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

ANALYTICAL CONDITIONS: Flame ionization detector, Chromosorb 101 column at 180 degrees Celsius.

CALIBRATION: Reagent grade "Methyl ethyl ketone" liquid is used as a standard. "Glass bulb" technique is utilized for making series of standards for calibration.

17.0 METHANOL STABILITY STUDY

Cylinder No.		17A
Cylinder Construction*		Al
Manufacturer Concentration	ppm	50.0
	Date	5/17/79
	ppm	(58.8)
RTI Concentration	Day	21
	ppm	(52.3)
	Day	51
	ppm	(51.1)
	Day	196
	ppm	(55.2)

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

ANALYTICAL CONDITIONS: Flame ionization detector, Chromosorb 101 column at 50 degrees Celsius or 0.2% Carbowax 1500 plus 0.1% SP-2100 on Carbowax C at 60 degrees Celsius.

CALIBRATION: Reagent grade "Methanol" is used as a standard. "Glass bulb" dilution technique is utilized for making series of standards for calibration.

18.0 1,2-DICHLOROPROPANE (PROPYLENE DICHLORIDE) STABILITY STUDY

Cylinder No.		18A	18B	18C	18D
Cylinder Construction*		Al	Al	Al	Al
Manufacturer Concentration	ppm	7.07	14.6	476	664
	Date	7/10/79	7/10/79	7/10/79	7/10/79
	ppm	(6.06)	(15.6)	(496)	(685)
RTI	Day	28	28	28	28
Concentration	ppm	(5.52)	(16.4)	(455)	(621)
	Day	48	48	48	48
	ppm	(5.94)	(15.0)	(480)	(675)
	Day	497	749	372	372
	ppm	(6.03)	(16.3)	(497)	(685)
	Day	749			
	ppm	(5.59)			

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

ANALYTICAL CONDITIONS: Flame ionization detector, 10% OV-101 on Chromosorb WHP column at 100 degrees Celsius.

CALIBRATION: Reagent grade "1,2-Dichloropropane" liquid is used as a standard. "Glass bulb" dilution technique is utilized for making series of standards for calibration.

19.0 TRICHLOROETHYLENE STABILITY STUDY

Cylinder No. / Cylinder Construction*		19A Al	19B Al	19C Al	19D Al
Manufacturer Concentration	ppm	9.23	14.7	100	505
	Date	5/24/79	5/24/79	5/24/79	5/24/79
	ppm	(9.58)	(14.3)	(102)	(506)
RTI Concentration	Day	77	77	77	77
	ppm	(10.2)	(15.1)	(103)	(503)
	Day	92	92	92	92
	ppm	(9.78)	(14.9)	(100)	(499)
	Day	683	683	810	810
	ppm	(9.03)	(13.6)	(105)	(522)
	Day	820	820	820	820
	ppm	(8.91)	(13.5)	(94.6)	(490)
	Day	1853	1853	1853	1853
	ppm	(9.40)	(14.0)	(105)	(523)

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

ANALYTICAL CONDITIONS: Flame ionization detector, 10% OV-101 on Chromosorb WHP column at 100 degrees Celsius.

CALIBRATION: Reagent grade "Trichloroethylene" liquid is used as a standard. "Glass bulb" technique is used for making series of standards for calibration.

20.0 1,1-DICHLOROETHYLENE (VINYLIDENE CHLORIDE) STABILITY STUDY

Cylinder No.		20A	20B	20C	20D
Cylinder Construction*		Al	Al	Al	Al
Manufacturer Concentration	ppm	9.58	14.8	96.8	490
	Date	6/1/79	6/1/79	6/1/79	6/1/79
	ppm	(10.3)	(15.6)	(101)	(524)
RTI	Day	35	35	35	35
Concentration	ppm	(9.90)	(15.1)	(99.0)	(510)
	Day	62	62	62	62
	ppm	(10.1)	(15.5)	(102)	(505)
	Day	404	404	817	404
	ppm	(11.5)	(17.1)	(94.0)	(498)
	Day	818	818	1831	1831
	ppm	(9.00)	(14.2)	(98.4)	(488)
	Day	1831	1831		
	ppm	(9.00)	(13.2)		

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

ANALYTICAL CONDITIONS: Flame ionization detector, 10% OV-101 on Chromosorb WHP column at 100 degrees Celsius or 10% SP-2100 on Supelcoport column at 100 degrees Celsius.

CALIBRATION: Reagent grade "1,1-Dichloroethylene" pure liquid is used as a standard. "Glass bulb" dilution technique is utilized for making series of standards for calibration.

21.0 1,2-DIBROMOETHYLENE STABILITY STUDY

Cylinder No. / Cylinder Construction*		21A LS	21B LS	21C LS	21D LS
Manufacturer Concentration	ppm	10.0	14.9	99.9	301
	Date	6/18/79	6/18/79	6/1/79	6/18/79
	ppm	(7.90)	(12.2)	(110)	(265)
RTi	Day	61	61	61	61
Concentration	ppm	(7.80)	(12.0)	(107)	(266)
	Day	89	89	89	89
	ppm	(7.40)	(11.6)	(105)	(257)
	Day	722	772	787	643
	ppm	(7.72)	(8.02)	(99.2)	(309)
		**	**	**	**

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

**Cylinders returned due to partial conversion to an unknown compound.

ANALYTICAL CONDITIONS: Flame ionization detector, 10% OV-101 on Chromosorb WHP column at 100 degrees Celsius.

CALIBRATION: Reagent grade "1,2-Dibromoethylene" pure liquid is used as a standard. "Glass bulb" dilution techniques is utilized for making series of standards for calibration.

ANALYTICAL PROBLEMS: The gas mixtures and the calibration standards contain substantial amounts of both the cis and the trans isomers of 1,2-Dibromoethylene. The first three sets of analyses are questionable because only one isomer was measured during the calibrations and cylinder analyses. During the GC analyses on Day 1864, it was found that dibromoethylene partially converted to an unknown compound. Hence, dibromoethylene is not practical as an audit material.

22.0 PERCHLOROETHYLENE STABILITY STUDY

Cylinder No. / Cylinder Construction**		22A S	22B S	22C LS	22D LS
Manufacturer Concentration	ppm	7.98	13.0	487	629
	Date	7/6/79	7/6/79	7/6/79	7/6/79
	ppm	(8.40)	(15.0)	(419)	(624)
RTI Concentration	Day	35	35	35	35
	ppm	(7.97)	(14.9)	(453)	(642)
	Day	52	52	52	52
	ppm	(7.92)	(14.7)	(440)	(619)
	Day	376	376	677	677
	ppm	(7.94)	(14.5)	(361)	(542)
	Day	1818	1818	713	713
	ppm	(6.88)*	(13.7)*	(387)	(571)
	Day			1818	1818
	ppm			(349)*	(557)

*Questionable value.

**Al = Aluminum; S = Steel; LS = Low Pressure Steel.

ANALYTICAL CONDITIONS: Flame ionization detector, 10% OV-101 on Chromosorb WHP column at 50 or 100 degrees Celsius.

CALIBRATION: Reagent grade "Perchloroethylene" liquid is used as a standard. "Glass bulb" dilution technique is utilized for making series of standards for calibration.

23.0 VINYL CHLORIDE STABILITY STUDY

Cylinder No. / Cylinder Construction*		23A S	23B S	23C S	23D S	23E S	23F S	23G S	23H S	23I S
Manufacturer Concentration	ppm	5.94	8.00	8.03	8.52	20.0	20.1	30.0	30.3	7.98
RTI Concentration	Date	10/1/79	10/1/79	10/1/79	10/1/79	10/1/79	10/1/79	10/1/79	10/1/79	10/1/79
	ppm	(5.87)	(7.71)	(7.82)	(7.85)	(19.7)	(20.1)	(29.6)	(29.8)	(7.31)
	Day	18	18	18	18	18	18	18	18	18
	ppm	(5.74)	(7.50)	(7.45)	(7.61)	(19.1)	(19.3)	(28.3)	(28.7)	(7.12)
	Day	700	**	700	700	700	700	700	700	700
	ppm	(6.60)		(8.44)	(8.41)	(20.7)	(20.9)	(29.4)	(29.4)	(8.39)
	Day	1812		1812	1812	1812	1812	1812	1812	1812
	ppm	(6.10)		(8.10)	(8.15)	(20.3)	(20.6)	(30.3)	(30.6)	(7.75)

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

**Cylinder empty.

ANALYTICAL CONDITIONS: Flame ionization detector, 0.4% Carbowax 1500 on Carbopak C at 50 degrees Celsius.

CALIBRATION: Vinyl chloride permeation tube purchased from Metronics is used for calibration. Permeation tube is maintained at 30°C.

24.0 1,3 BUTADIENE STABILITY STUDY

Cylinder No.		24A
Cylinder Construction*		S
Manufacturer Concentration	ppm	22.6
RTI Concentration	Date	3/21/80
	ppm	(20.9)
	Date	95
	ppm	(23.1)
	Day	480
	ppm	(24.0)

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

ANALYTICAL CONDITIONS: Flame ionization detector, 0.1% SP-1000 on Carbopak C column at 90 degrees Celsius or 10% OV-101 on Chromosorb WHP column at 60 degrees Celsius.

CALIBRATION: Reagent grade "1,3 Butadiene" liquid is used as a stan dard. "Glass bulb" dilution technique is utilized for making series of standards for calibration.

25.0 ACRYLONITRILE STABILITY STUDY

Cylinder No. / Cylinder Construction*		25A LS	25B LS	25C LS	25D LS	25E AL	25F AL
Manufacturer Concentration	ppm	20.1	348	11.7	638	400	10.0
	Date	7/24/79	7/24/79	7/24/79	7/24/79	11/8/82	11/18/82
	ppm	(14.6)	(411)	(6.38)	(678)	(413)	(10.8)
RTI	Day	185	185	185	185	134	139
Concentration	ppm	(12.7)	(416)	(3.35)	(699)	(410)	(11.7)
	Day	349	349	349	349		
	ppm	(13.2)	(441)	(2.87)	(703)		
	Day	841	841	841	841		
	ppm	(9.96)	(397)	(4.05)	(667)		
	Day	**	**	**	**		
	ppm						

*Al = Aluminum; S = Steel; LS= Low Pressure Steel.

**Cylinder empty.

ANALYTICAL CONDITIONS: Flame ionization detector, 4% Carbowax 20M on Carbopak B at 50 or 150 degrees Celsius.

CALIBRATION: Acrylonitrile permeation tube is used for GC-FID calibration. Permeation tube is maintained at 30° ± 0.1°C.

ANALYTICAL PROBLEMS: The large changes noted at the low concentration levels are, at least in part, a result of difficulty in making precise measurements at these levels.

26.0 ANILINE STABILITY STUDY

Cylinder No.		26A	26B
Cylinder Construction*		Al	Al
Manufacturer	ppm	11.3	18.4
RTI Analysis		See Analytical Problems	

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

ANALYTICAL CONDITIONS: Flame ionization detector, 10% OV-101 on Chromosorb WHP column at 250 degrees Celsius.

CALIBRATION: Reagent grade "Aniline" pure liquid is used as a standard. "Glass bulb" dilution technique is utilized for making series of standards for calibration.

ANALYTICAL PROBLEMS: Because aniline has an extremely high boiling point (186°C), special handling would be required to measure this compound. A completely heated system for sampling in the vapor phase and for preparing standards would be required. Temperature-dependent condensation in the cylinder and the regulator causes the amount of aniline which is delivered by the cylinder to vary. As a result, aniline is not considered to be practical as an audit material.

27.0 METHYL ISOBUTYL KETONE STABILITY STUDY

Cylinder No.		27A	27C
Cylinder Construction*		Al	Al
Manufacturer Concentration	ppm	9.51	72.9
	Date	12/18/80	7/8/81
	ppm	(10.2)	(75.4)
RTI	Day	27	See Analytical
Concentration	ppm	(10.6)	Problems
	Day	83	
	ppm	(9.53)	
	Day	202	
	ppm	(9.49)	
	Day	1275	
	ppm	(8.40)	

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

ANALYTICAL CONDITIONS: Flame ionization detector, 0.1% SP-1000 on Carbopak C column at 180° degrees Celsius.

CALIBRATION: Reagent grade "Methyl isobutyl ketone" liquid is used as a standard. "Glass bulb" technique is utilized for making series of standards for calibration.

ANALYTICAL PROBLEMS: Methyl isobutyl ketone at high concentrations is not practical as an audit material because pressurization of the cylinder above approximately 200 psi results in condensation of the analyte.

28.0 CYCLOHEXANONE STABILITY STUDY

Cylinder No.		28A	28B
Cylinder Construction*		Al	Al
Manufacturer Concentration	ppm	10.1	19.0
RTI Analysis	Date	12/11/80	12/11/80
	ppm	(8.19)	(25.5)
	Day	85	85
	ppm	(3.26)	(17.1)
		See Analytical Problems.	

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

ANALYTICAL CONDITIONS: Flame ionization detector, 10% SP-1000 or Supelco-
port column at 200 degrees Celsius.

CALIBRATION: Reagent grade "Cyclohexanone" liquid is used as a standard. "Glass bulb" technique is used for making series of standards for calibration.

ANALYTICAL PROBLEMS: The analysis of cyclohexanone gas is dependent on the temperatures of the cylinder and the regulator and on the length of the sampling line between the regulator and the gas chromatograph. The concen- tration in the cylinder decreases with time. Therefore, cyclohexanone is not practical as an audit material.

29.0 PARADICHLOROBENZENE STABILITY STUDY

Cylinder No.		29A	29B
Cylinder Construction*		S	S
Manufacturer Concentration	ppm	15.6	38.1
RTI Analysis		See Analytical Problems	

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

ANALYTICAL CONDITIONS: Flame ionization detector, 10% SP-1000 on Supelcoport column at 200 degrees Celsius.

CALIBRATION: Reagent grade "Paradichlorobenzene" is used as a standard. "Glass bulb" technique is used for making series of standards for calibration.

ANALYTICAL PROBLEMS: The stability study for this compound was terminated because of analytical difficulties and because the cylinder pressure was less than 200 psig. Paradichlorobenzene is a solid at room temperature with a melting point of 54°C. Condensation in the cylinder, regulator and sampling lines was extreme. Paradichloro benzene is not practical as an audit material.

30.0 ETHYLAMINE STABILITY STUDY

Cylinder No.		30A	30B
Cylinder Construction*		S	S
Manufacturer Concentration	ppm	10	20
RTI Analysis		See Analytical Problems	

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

ANALYTICAL CONDITIONS: Flame ionization detector, 10% OV-101 Chromosorb WHP column at 250 degrees Celsius.

CALIBRATION: Reagent grade "Ethylamine" liquid is used as a standard. "Glass bulb" technique is utilized for making series of standards for calibration.

ANALYTICAL PROBLEMS: Because of vapor pressure considerations, the cylinders could not be fully pressurized. The pressure in the cylinder is less than 200 psi. A completely heated system for sampling in the vapor phase and for preparing standards would be required. Temperature-dependent condensation in the cylinder and the regulator causes the amount of ethylamine which is delivered by the cylinder to vary. As a result of these problems, ethylamine is not considered to be practical as an audit material.

31.0 FORMALDEHYDE STABILITY STUDY

RTI Requested Concentration	ppm	10	20

The speciality gas supplier indicated that they could not make gas mixtures containing formaldehyde.

32.0 METHYLENE CHLORIDE STABILITY STUDY

Cylinder No. Cylinder Construction*		32A Al
Manufacturer Concentration	ppm	10.2
RTI Concentration	Date	3/5/82
	ppm	(10.8)
	Day	31
	ppm	(10.8)
	Day	70
	ppm	(10.6)
	Day	96
	ppm	(11.2)
	Day	124
	ppm	(11.4)
	Day	160
	ppm	(10.9)
	Day	277
	ppm	(10.2)
	Day	278
	ppm	(10.2)
	Day	278
	ppm	(9.80)
	Day	381
	ppm	(9.70)
	Day	843
	ppm	(9.20)

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

ANALYTICAL CONDITIONS: Flame ionization detector, 20 ft. X 1/8" SS column packed with 10% SP-1000 on 80/100 Supelcoport. 30 cm^3/minute He carrier gas. Column temp. = 100°C. Detector temp. = 175°C.

CALIBRATION: Reagent grade "Methylene chloride" liquid is used as a standard. "Glass bulb" technique is utilized for making series of standards for calibration.

33.0 CARBON TETRACHLORIDE STABILITY STUDY

Cylinder No. Cylinder Construction*		33A AL
Manufacturer Concentration	ppm	11.3
RTI Concentration	Date	3/4/82
	ppm	(12.7)
	Day	74
	ppm	(11.7)
	Day	74
	ppm	(10.2)
	Day	98
	ppm	(11.1)
	Day	124
	ppm	(10.6)
	Day	161
	ppm	(10.2)
	Day	279
	ppm	(9.30)
	Day	279
	ppm	(9.40)
	Day	382
	ppm	(10.5)
	Day	832
	ppm	(9.60)

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

ANALYTICAL CONDITIONS: Flame ionization detector, 20 ft. x 1/8" SS column packed with 10% SP-1000 on 80/1000 Supelcoport. 30 cm^3/minute He carrier gas. Column temp. = 100°C. Detector temp. = 175°C.

CALIBRATION: Reagent grade "Carbon tetrachloride" liquid is used as a standard. "Glass bulb" dilution technique is utilized for making series of standards for calibration.

34.0 FREON 113 STABILITY STUDY

Cylinder No.		34A
Cylinder Construction*		Al
Manufacturer Concentration	ppm	10.4
RTI	Date	3/3/82
Concentration	ppm	(10.8)
	Day	34
	ppm	(10.1)
	Day	70
	ppm	(10.0)
	Day	70
	ppm	(9.60)
	Day	98
	ppm	(10.0)
	Day	125
	ppm	(10.0)
	Day	162
	ppm	(10.3)
	Day	384
	ppm	(9.80)
	Day	857
	ppm	(11.0)

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

ANALYTICAL CONDITIONS: Flame ionization detector, 20 ft. x 1/8" SS column packed with 10% SP-1000 on 80/100 Supelcoport. 30 cm^3/minute He carrier gas. Column temp. = 100°C. Detector temp. = 175°C.

CALIBRATION: Reagent grade "Freon 113" liquid is used as a standard. "Glass bulb" dilution technique is utilized for making series of standards for calibration.

35.0 METHYL CHLOROFORM STABILITY STUDY

Cylinder No.		35A
Cylinder Construction*		Al
Manufacturer Concentration	ppm	10.2
RTI	Date	3/2/82
Concentration	ppm	(10.3)
	Day	70
	ppm	(11.8)
	Day	99
	ppm	(10.7)
	Day	136
	ppm	(10.6)
	Day	161
	ppm	(10.0)
	Day	381
	ppm	(10.4)
	Day	858
	ppm	(10.0)

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

ANALYTICAL CONDITIONS: Flame ionization detector, 20 ft. x 1/8" SS column packed with 10% SP-1000 on 80/100 Supelcoport. 30 cm^3/minute He carrier gas. Column temp. = 100°C. Detector temp. = 175°C.

CALIBRATION: Reagent grade "Methyl chloroform" is used as a standard. "Glass bulb" dilution technique is utilized for making series of standards for calibration.

36.0 ETHYLENE OXIDE STABILITY STUDY

Cylinder No.		36A
Cylinder Construction*		Al
Manufacturer Concentration	ppm	10.0
RTI Concentration	Date	3/12/82
	ppm	(11.2)
	Day	73
	ppm	(9.60)
	Day	88
	ppm	(9.80)
	Day	122
	ppm	(9.60)
	Day	157
	ppm	(9.80)

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

ANALYTICAL CONDITIONS: Flame ionization detector, 6 ft. x 1/8" SS column packed with 80/100 mesh Porapak QS. 30 cm^3/minute Helium carrier gas. Column temp. = 150°C. Detector temp. = 175°C.

CALIBRATION: Ethylene oxide permeation tube purchased from Metronics is used for GC-FID calibration. Permeation tube is maintained at 30°C.

ANALYTICAL PROBLEMS: There appeared to be some loss of ethylene oxide when a brass regulator was used on the cylinder.

37.0 PROPYLENE OXIDE STABILITY STUDY

Cylinder No. Cylinder Construction*		37A Al	37B Al
Manufacturer Concentration	ppm	9.48	96.0
RTI	Day	8/4/82	8/4/82
Concentration	ppm	(12.3)	(89.5)
	Day	55	55
	ppm	(11.8)	(86.9)
	Day	76	76
	ppm	(10.6)	(83.6)
	Day	743	121
	ppm	(8.10)	(90.8)
	Day		743
	ppm		(75.7)

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

ANALYTICAL CONDITIONS: Flame ionization detector, 6 ft. X 1/8" SS column packed with 80/100 mesh Porapak QS. 30 cm^3/min Hellum carrier gas. Column temp. = 150°C. Detector temp. = 175°C.

CALIBRATION: Reagent grade "propylene oxide" is used as a standard. "Glass bulb" dilution technique is utilized for making series of standards for calibration.

38.0 ALLYL CHLORIDE STABILITY STUDY

Cylinder No.		38A	38B
Cylinder Construction*		Al	Al
Manufacturer Concentration	ppm	10.2	99.5
RTI	Date	8/13/82**	8/13/82**
Concentration	ppm	(11.6)	(124)
	Day	75	74
	ppm	(5.25)	(87.2)
	Day	110	110
	ppm	(5.08)	(87.7)
	Day	167	167
	ppm	(5.36)	(83.4)
	Day	727	727
	ppm	(4.53)	(53.6)

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

**Initial analysis was questionable.

ANALYTICAL CONDITIONS: Flame ionization detector, 20 ft. X 1/8" SS column packed with 10 % SP-1000 Supelcoport. 30 cm^3/minute Helium carrier gas. Column temp. = 100°C. Detector temp. = 175°C.

CALIBRATION: Reagent grade "Allyl chloride" is used as a standard. "Glass bulb" dilution technique is utilized for making series of standards for calibration.

39.0 ACROLEIN STABILITY STUDY

Cylinder No.		39A	39B
Cylinder Construction*		Al	Al
Requested Concentration	ppm	10.2	107
RTI Concentration	Date	8/18/82	8/18/82
	ppm	(10.6)	(90.4)
	Day	28	28
	ppm	(11.0)	(103)
	Day	69	69
	ppm	(9.74)	(106)
	Day	728	728
	ppm	(6.90)	(80.8)

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

ANALYTICAL CONDITIONS: Flame ionization detector, 20 ft. X 1/8" SS column packed with 10 % SP-1000 on 80/100 Supelcoport. 30 cm^3/min Helium carrier gas. Column temp = 100°C. Detector temp. = 175°C.

CALIBRATION: Reagent grade "acrolein" is used as a standard. "Glass bulb" dilution technique is utilized for making series of standards for calibration.

40.0 CHLOROBENZENE STABILITY STUDY

Cylinder No. Cylinder Construction*		40A Al	40B Al	40C
Manufacturer Concentration	ppm	9.66	14.84	4.89
RTI	Date	8/6/82	10/11/83	10/11/83
Concentration	ppm	(9.03)	(14.7)	(4.19)
	Day	39		
	ppm	(9.15)		
	Day	75		
	ppm	(9.20)		
	Day	380		
	ppm	(9.62)		

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

ANALYTICAL CONDITIONS: Flame ionization detection, 20' X 1/8" stainless steel column packed with 10% SP-1000 on 80/100 mesh Supelcoport. 30 cc/min Helium carrier gas. Column temp. = 150°C. Detector temp = 175°C.

CALIBRATION: Reagent grade chlorobenzene was used as a standard. "Glass bulb" dilution technique is utilized for making a series of standards.

41.0 CARBON DISULFIDE STABILITY STUDY

Cylinder No.		41A
Cylinder Construction*		Al
Manufacturer Concentration	ppm	108
RTI Concentration	Date	7/14/82
	ppm	(100)
	Day	34
	ppm	(114)
	Day	72
	ppm	(116)

*Al = Aluminum; S = Steel; LS = Low Pressure Steel.

ANALYTICAL CONDITIONS: Flame photometric detector, 4.6' X 1/4" Teflon® column packed with Carbopak BHT 100. 90 cc/min Helium carrier gas. Column temp. = 75°C. Detector temp. = 175°C.

CALIBRATION: Reagent grade carbon disulfide is injected into a Teflon® bag being filled with N_2 at 5 L/min. through a mass flow controller. The injection fitting is heated slightly to ensure volatilization.

ANALYTICAL PROBLEMS: There is significant peak "tailing" unless a very high flow rate is used. "Tailing" is also caused by "bleed" from the sample loop. Sample valve should be in the inject position for exactly 5 seconds and then switched back to the sampling position to attenuate tailing. All sample lines and regulators must be conditioned extensively.

42.0 EPA METHOD 25 GAS MIXTURE STABILITY STUDY*

Cylinder No.		42A	42B	42C	42D	42E	42F
Cylinder Construction***		Al	Al	Al	Al	Al	Al
Requested Concentration	ppm	100	100	200	750	1000	2000
RTI Concentration	Date	3/16/83	3/16/83	3/16/83	3/16/83	3/16/83	3/16/83
	ppmC	(102)	(107)	(205)	(775)	(1040)	(1940)
	Day	483	483	**	483	483	483
	ppmC	(97.9)	(104)		(779)	(1060)	(1930)

*Gas Mixture contains an aliphatic, an aromatic and carbon dioxide in nitrogen.

**Cylinder empty.

***Al = Aluminum; S = Steel; LS = Low Pressure Steel

42.0 EPA METHOD 25 GAS MIXTURE STABILITY STUDY* (Continued)

Cylinder No.		42G	42H	42I	42J	42K	42L
Cylinder Construction**		Al	Al	Al	Al	Al	Al
Manufacturer Concentration	ppm	100	100	150	150	200	200
RTI Concentration		***	***	***	***	***	***

*Gas Mixture contains an aliphatic, an aromatic and carbon dioxide in nitrogen.

**Al = Aluminum; S = Steel; LS = Low Pressure Steel.

***Cylinders were ordered but not yet received. Manufacturer concentrations are nominal concentrations.

43.0 ETHYLENE DIBROMIDE STABILITY STUDY

Cylinder No.		43A	43B	43C	43D
Cylinder Construction**		S	S	S	S
Manufacturer Concentration	ppm	10	20	100	300
RTI Concentration		*	*	*	*

*Cylinders were ordered but not yet received. Manufacturer concentrations are nominal concentrations.

**Al = Aluminum; S = Steel; LS = Low Pressure Steel.

44.0 1,1,2,2-TETRACHLOROETHANE STABILITY STUDY

Cylinder No.		44A
Cylinder Construction**		Al
Manufacturer Concentration	ppm	10
RTI Concentration		*

*Cylinder was ordered but not yet received. Manufacturer concentration is nominal concentration.

** Al = Aluminum; S = Steel; LS = Low Pressure Steel.